

SUCTION CUPS RANGE

NOVACOM develops and produces a comprehensive range of suction cups: flat and with bellows, oval and rectangular shapes... More than **5000** references are available in various materials (natural rubber, nitrile, silicon food safe, vinyl ...). The range also includes fittings and accessories for a complete vacuum system.



2026



01 | Flat



SERIE 5 - ø 7 to 87 mm



SERIE 6 - ø 127,2 mm



SERIE 7 - ø 9 to 78,5 mm
 SERIE 70S - ø 15 to 25 mm
 SERIE 7R - ø 32 to 127 mm
 SERIE 70P - ø 20 to 33 mm
 SERIE 7FP - ø 59,5 mm


SERIE 7PH - ø 12 to 25 mm
 SERIE 7SC - ø 20 mm
 SERIE 7SB - ø 8 to 125,5 mm
 SERIE 7SP - ø 17 to 43 mm




SERIE 9 - ø 5 to 51 mm



SERIE 90 - ø 16,5 to 150 mm

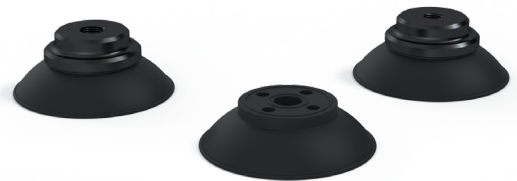

SERIE 94 - ø 100 mm

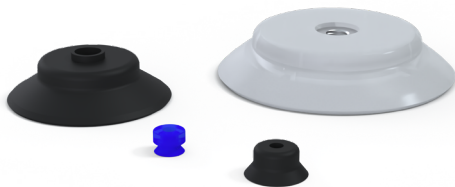

SERIE PFG - ø 4 to 225 mm




SERIE PFTF - ø 21 to 225 mm



SERIE PFTM - ø 4 to 93,4 mm




SERIE PFYK - ø 116,5 to 225 mm

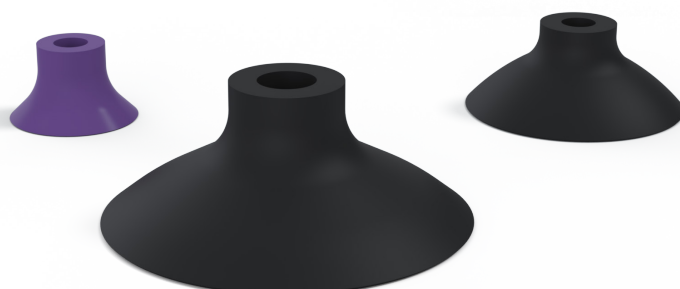

SERIE VPC - ø 7,6 to 95,4 mm

02 | 1,5 bellows

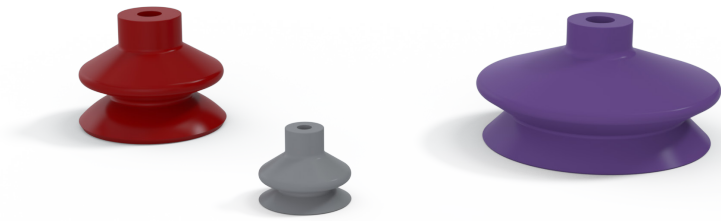

SERIE I - \varnothing 5 to 85 mm



SERIE 8 - \varnothing 7 to 72 mm
 SERIE 8A - \varnothing 30 to 49 mm
 SERIE 8C - \varnothing 31 mm
 SERIE 8R - \varnothing 32 to 114 mm
 SERIE 8SB - \varnothing 8 to 125 mm

SERIE 8SB SPF - \varnothing 75 to 129 mm
 SERIE 8ISB - \varnothing 20 to 40 mm
 SERIE 8SC I - \varnothing 30 mm
 SERIE 8SP - \varnothing 22,5 to 33 mm



SERIE 91 - \varnothing 6 to 159,5 mm



SERIE AR VF- \varnothing 43 and 56 mm



SERIE PBG - \varnothing 11 to 154,1 mm





SERIE PJG - \varnothing 6,5 to 50,5 mm




SERIE VCS I - \varnothing 13,2 to 57 mm


03 | 2,5 bellows

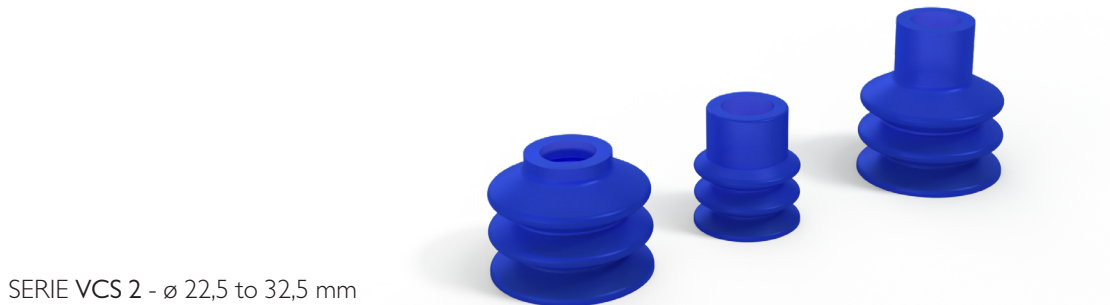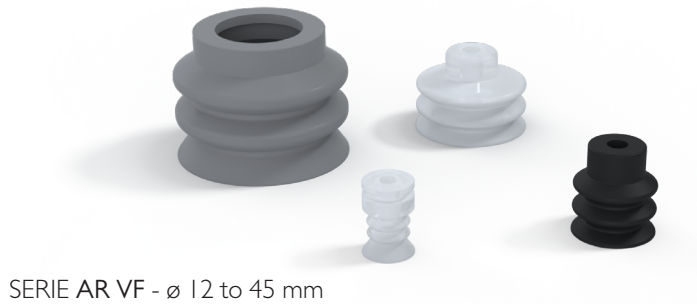

04 | 3,5 bellows

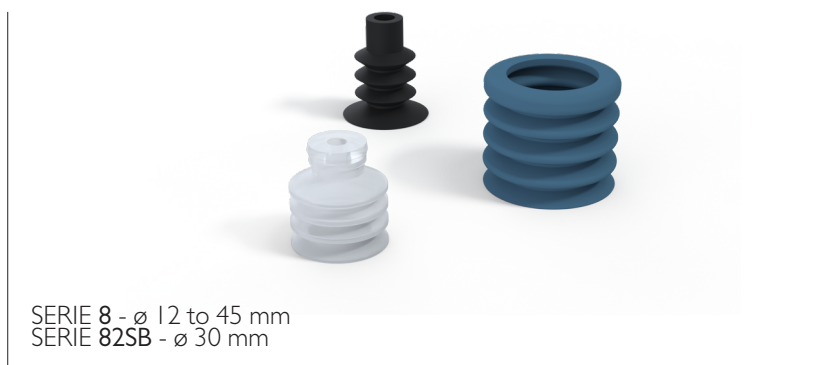

05 | Multiple bellows

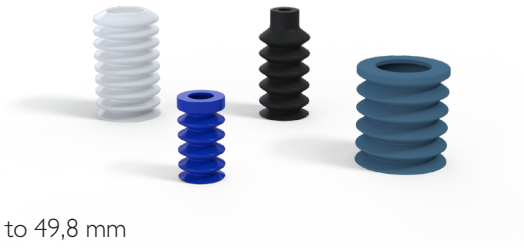


SERIE 8 - \varnothing 24,5 to 49,8 mm



SERIE 92 - \varnothing 20 to 50 mm
SERIE 92-2 - \varnothing 48,3 mm

06 | Oblong

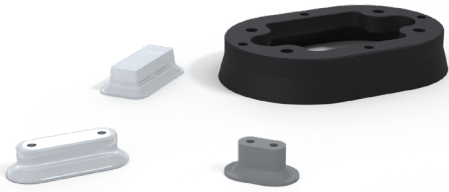

SERIE 4 - L. 14,5 to 97 mm



SERIE 4B0 - L. 86 mm




SERIE 4PA - L. 59,7 to 156 mm



SERIE 4R - L. 72 to 140 mm




SERIE 4V - L. 10,5 to 102 mm

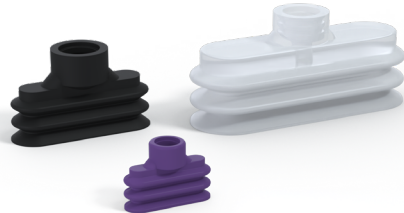

SERIE 4VS - L. 25 to 75 mm




SERIE PFG - L. 4 to 7,4 mm

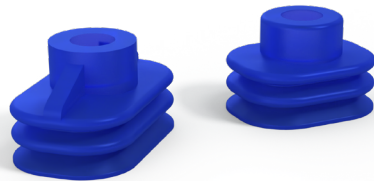


SERIE VCISO - L. 35 to 45,5 mm

07 | Rectangular

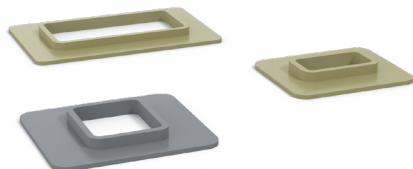


SERIE 4F - L. 47 to 74 mm

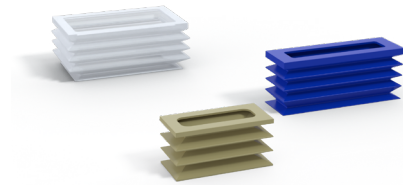


SERIE 4P - L. 52 to 74 mm


08 | Special sizes

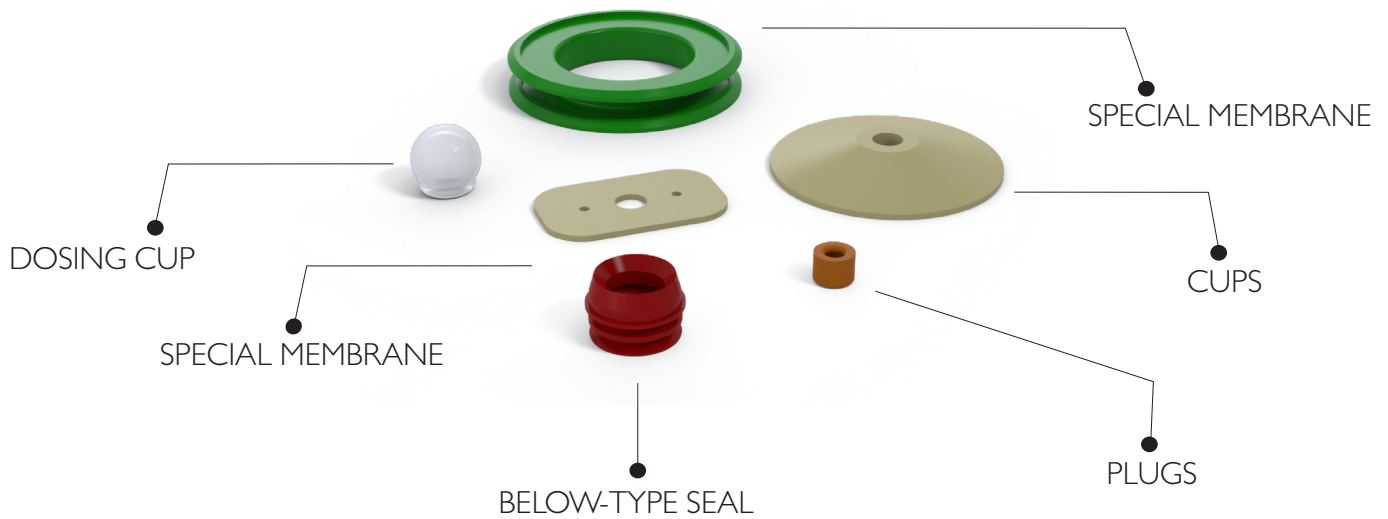

09 | Accessories

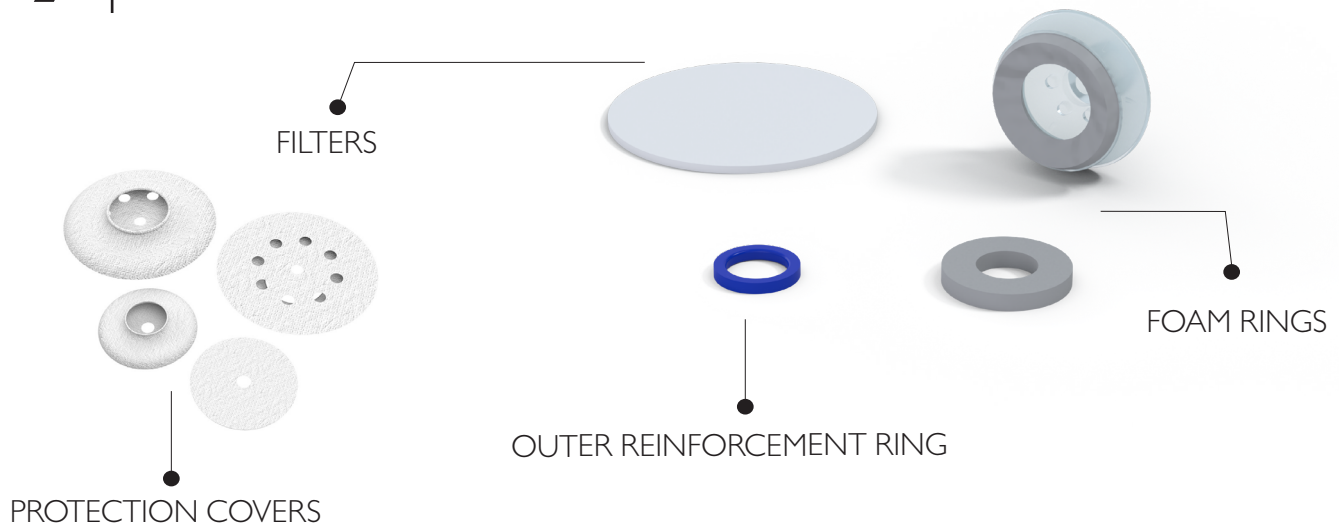

10 | Fittings

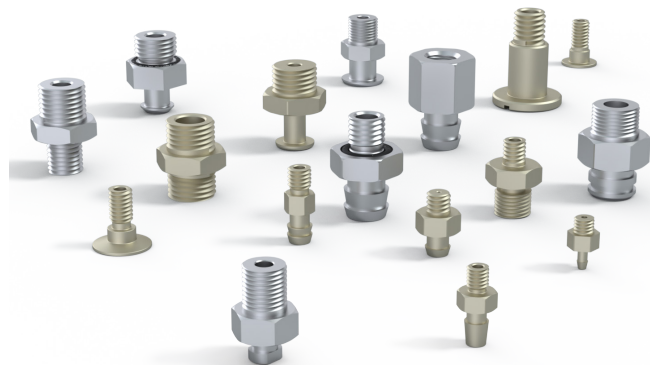























Connections available

- M5
- M6
- M8
- M10
- M12
- G1/4"
- G1/8"
- G3/8"

Materials








- Aluminium
- Brass
- Nickel-plated brass
- Stainless steel
- Galvanized steel

11 | Elastomers - Materials

CODE	MATERIAL	COLOUR	SHORE HARDNESS (+/- 5)	FLEXIBILITY	ABRASION RESISTANCE	TEMPERATURE RESISTANCE C°	UV - WEATHER RESISTANCE	OIL RESISTANCE	FOOD SAFETY	SERIES OF SUCTION CUPS	MIGRATION TEST	ENVIRONMENT
NI	Nitrile		50, 70	✓	✓	-10/+80	✗	✓✓	✗	1-2-4-5-7-8 9-PBG-PFG PJG-VPC	✗	STANDARD
NR	Natural rubber		50	✓✓✓	✓✓	-20/+70	✗✗	✗✗	✗	1-2-6-7-8-9	✗	Packaging/ Print
CN	Natural rubber		35	✓✓✓	✓✓	-20/+70	✗✗	✗✗	FDA**	2-4-5-7-8	✗	Packaging/ Print
CNB	Natural rubber		50	✓✓✓	✓✓	-20/+70	✗✗	✗✗	✗	8	✗	Packaging/ Print
CN	Natural rubber		40	✓✓✓	✓✓	-20/+70	✗✗	✗✗	✗	7	✗	Packaging/ Print
PARA	Natural rubber		40, 50	✓✓✓	✓✓	-20/+70	✗✗	✗✗	✗	7-8	✗	Packaging/ Print
PARA	Natural rubber		40	✓✓✓	✓✓	-20/+70	✗✗	✗✗	✗	5-7-8	✗	Packaging/ Print
SL	Silicone*		40, 60	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-8	✓	Standard
SLRV	Silicone*		40, 60	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	7-8-9	✓	Standard
SLV	Silicone*		60	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-7-8	✗	Standard
SLB	Silicone*		20, 40	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	4-5-7-8	SH40 : ✓ Others: ✗	Cosmetics/ Pharmaceutical
SLBLEU	Silicone*		30	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-4BO- 7-8	✓	Packaging
SLBLEU	Silicone*		50, 60	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-PFG	✓	Packaging
SLG	Silicone*		40	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA**	COUP - 8	✗	Packaging
SLT	Silicone*		40, 60	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-4-5 -6- 7-8 9-PBG- PFG PJG-VPC	SH40 : ✓ Others: ✗	Standard
SLDB	Detectable silicone*		25, 40, 60	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-8-9	SH25, SH40 : ✓ Others: ✗	Food-processing
SLDR	Detectable silicone*		25, 40	✓✓✓	✗	-60/+250	✓✓✓	✗	☞**	8	SH25 : ✓ Others: ✗	Food-processing
SLDG	Detectable silicone*		40	✓✓✓	✗	-60/+250	✓✓✓	✗	FDA ☞**	1-2-8	✗	Food-processing
MNT	Mark-free material		40	✓	✓	-20/+160	✓✓✓	✓✓✓	✗	VPC-1-2- 4V-9	✗	Plastics
UR	Urethane		50	✓	✓✓✓	-20/+80	✓✓	✓✓	✗	PBG-PFG- PJG	✗	Standard
PU	Polyurethane		60	✓	✓✓✓	-20/+80	✓✓	✓✓	✗	1-2-7-8-9	✗	Standard
EPDM	Ethylene propylene diene		40	✓	✓✓	-40/+110	✓✓✓	✗	✗	1-2-4-7-8	✗	Moist Chemical

✓✓✓ Excellent ✓✓ Good ✓ Average ✗ Low ✗✗ Not recommended
 * Possibility of requesting an FDA and/or CE certification on various references, contact us.
 ** Food contact certification: (CE) 1935/2004 - (FDA) 21 CFR § 177.2600

12 | Thermoplastic - Materials

CODE	MATERIAL	COLOUR	SHORE HARDNESS (+/- 5)	FLEXIBILITY	ABRASION RESISTANCE	TEMPERATURE RESISTANCE C°	UV - WEATHER RESISTANCE	OIL RESISTANCE	FOOD SAFETY	SERIES OF SUCTION CUPS	MIGRATION TEST	ENVIRONMENT
TPE	Thermoplastic*		50	✓✓	✓✓✓	-20/+80	✓	✓✓	FDA  ***	1-2-7-8	✗	Standard/ Food-processing
TPU	Polyurethane thermoplastc		70	✓	✓✓✓	-20/+80	✓	✓✓	✗	8-9	✗	Standard
TPUB	Polyurethane thermoplastc		70	✓	✓✓✓	-20/+80	✓	✓✓	✗	7SB-8SB	✗	Standard
VI	Vinyl		50	✓✓	✓✓	-30/+65	✓	✓	✗	VC	✗	Packaging
PVC	Polyvinyl chloride		70	✓✓	✓✓	-20/+80	✓	✓	 **	VM	✗	Standard

✓✓✓ Excellent ✓✓ Good ✓ Average ✗ Low ✗✗ Not recommended
 * Possibility of requesting an FDA and/or CE certification on various references, contact us.
 ** Food contact certification: (CE) 1935/2004 - (FDA) 21 CFR § 177.2600

FURTHER INFORMATION

The FDA and / or CE certificates must be requested at the same time as you order. NOVACOM has a wide range of elastomers and thermoplastic materials to respond fully to our industrial customers' expectations. We can also develop new materials according to drawn up specifications.



Find us on /Novacom International  | 

Contact us : info@novacom-grp.com

www.novacom-vacuum.com

Z.A. Sars et Rosières • 30 rue de l'Épau, 59230 ROSULT - France • Phone : +33 (0)3 27 30 53 53

NOVACOM • All rights reserved • Non-contractual photos • Do not throw on public roads • FR57 381 120 484 • RCS Valenciennes