



CVM 130X300 SV ED TECHNICAL SHEET EJECTOR VACUUM BOXES

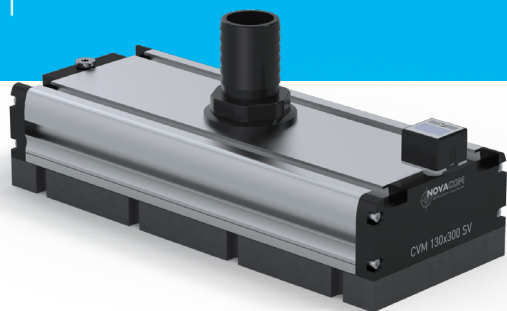

SCHEMATIC DIAGRAM

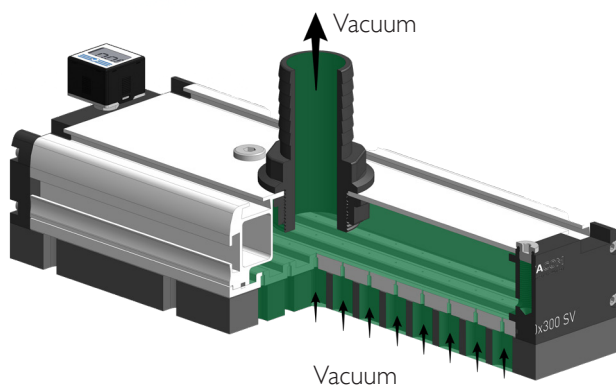

**CVM
 RANGE
 EDITION**

TECHNICAL INFORMATION**


CVM 130x300 SV ED	Pressure (bar)	Air consumption (NI/mn)	Noise level (dB)	Lifting force (N)	Ø inner hose	Minimum required suction flow rate (l/min)*
	-	-	-	410	40mm	250

* Minimal required recommendations : External vacuum generator with a suction flow rate of 250 l/min to 1215 l/min.

CVM 130x300 SV ED FEATURES

- Weight : 2.1 Kg • Max. Operating Temperature : 60°C
- Max pressure: 7 bar • Materials : Aluminium, standard nitrile seal; EPDM

DIMENSIONS

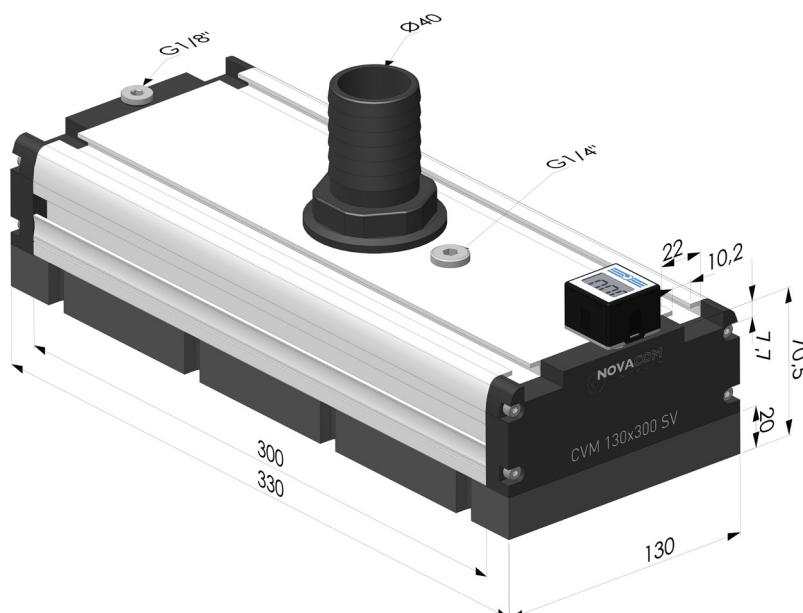

EXPLODED VIEW

- | | |
|--------------------------------------|---|
| 1 Partition (x2) | 7 Partition seal (x2) |
| 2 CVM body (x1) | 8 CVM bottom (x1) |
| 3 Cylindrical plug G1/8" (x2) | 9 Foam band with filter (x1) |
| 4 P60VL F3 display (x1) | 10 CHC M4x16 hex socket screw (x8) |
| 5 Supply connector (x1) | 11 FHC M4x12 flat head screw (x8) |
| 6 Lock-nut (x1) | 12 Bottom seal of CVM (x2) |

