



CVM 130X600 CS ED TECHNICAL SHEET EJECTOR VACUUM BOXES

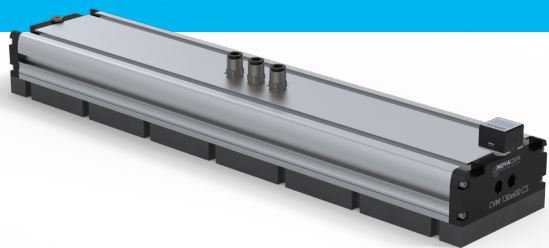

SCHEMATIC DIAGRAM

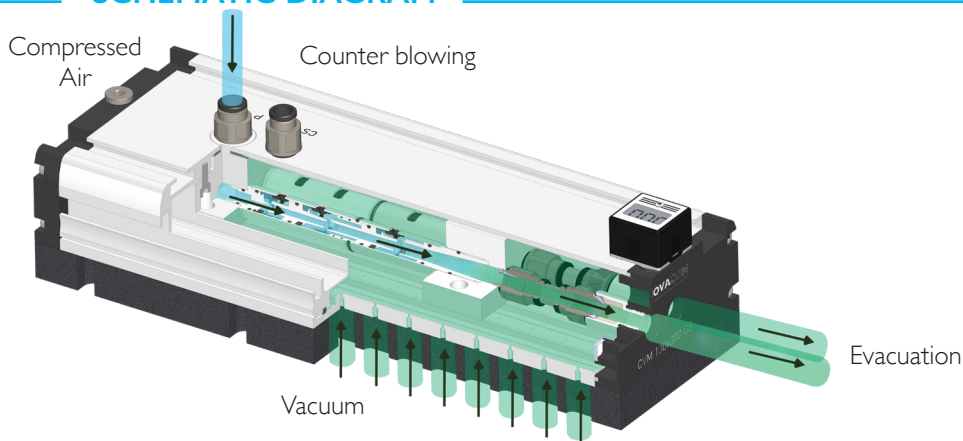

Vacuum

UP TO
75%
 OF VACUUM

TECHNICAL INFORMATION**


BENEFITS OF USING CVM 130x600 CS ED*

Pressure (bar)	Air consumption (NI/mn)	Noise level (dB)	Lifting force (N)	Vacuum (%)	Suction rate (NI/min)
6	450	83	1288	75	1344


CVM 130x600 CS ED* FEATURES

- **Connection** : 2x Female G3/8" • **Weight** : 4,6 kg • **Max. Operating Temperature** : 60°C
- **Max pressure** : 7 bar • **Materials** : Aluminium, standard partition seal


AIR CONSUMPTION DEPENDING ON PRESSURE

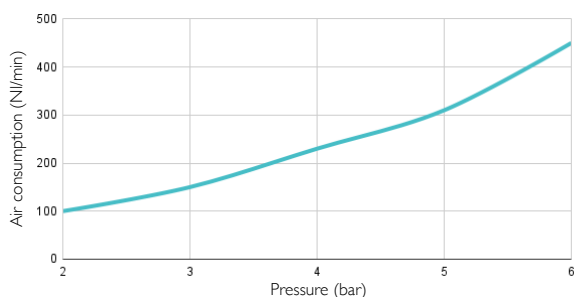


ASPIRATED AIR DEPENDING ON PRESSURE

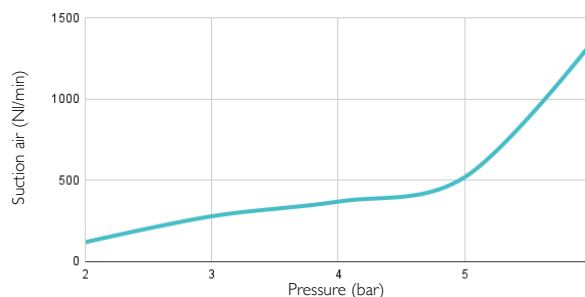

VACUUM LEVEL (%) DEPENDING ON PRESSURE

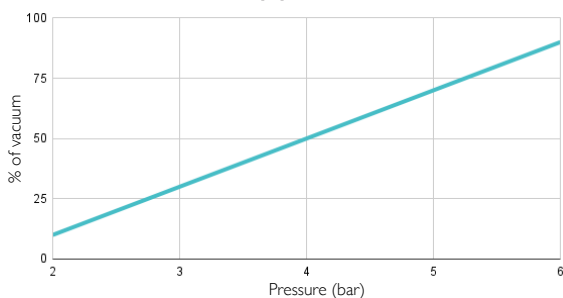


NOISE LEVEL DEPENDING ON PRESSURE

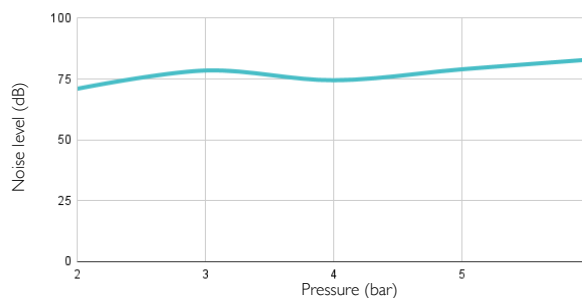

* **NOTE** : NoNote: We recommend supplying the CVM with compressed air through both G3/8 ports using hoses with an inner diameter of 8 mm for optimal performance.

** On perfectly airtight product

DIMENSIONS

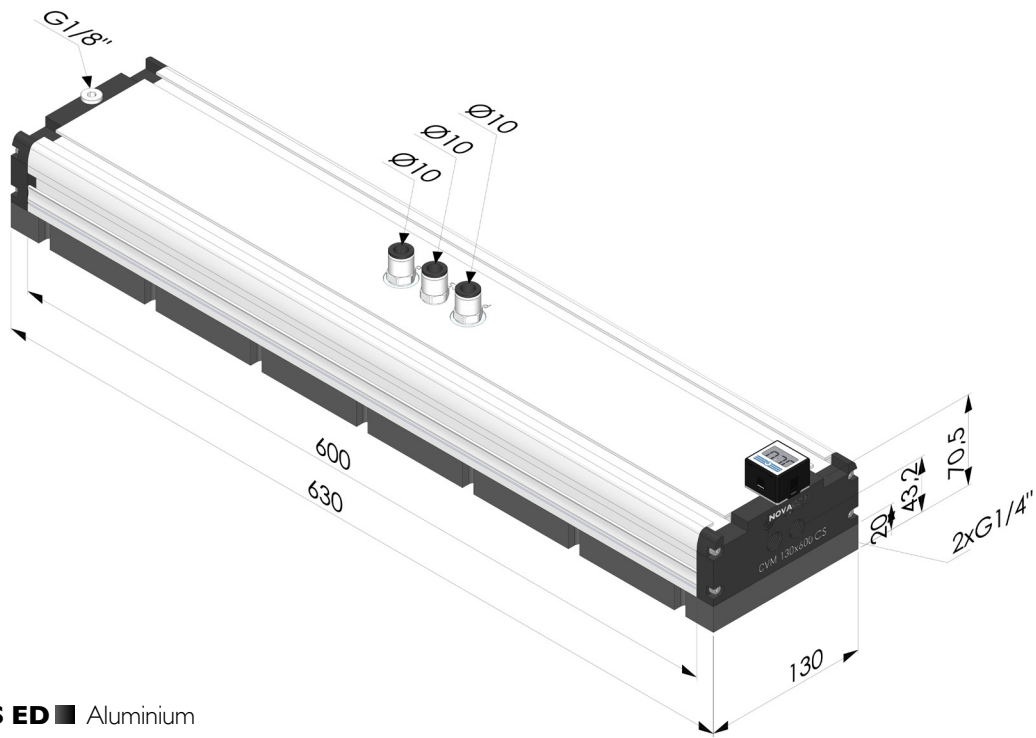

CVM I30X600 CS ED ■ Aluminium