


BJP 14 72


TECHNICAL SHEET

AIR NOZZLES

FLAT AIRSTREAM

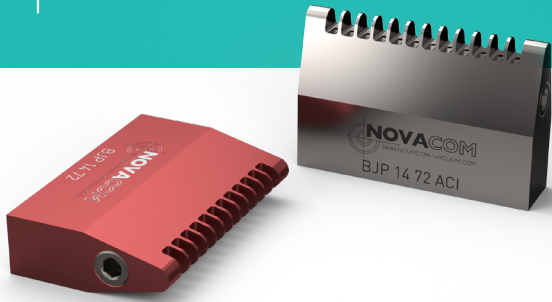

OPERATING PRINCIPAL

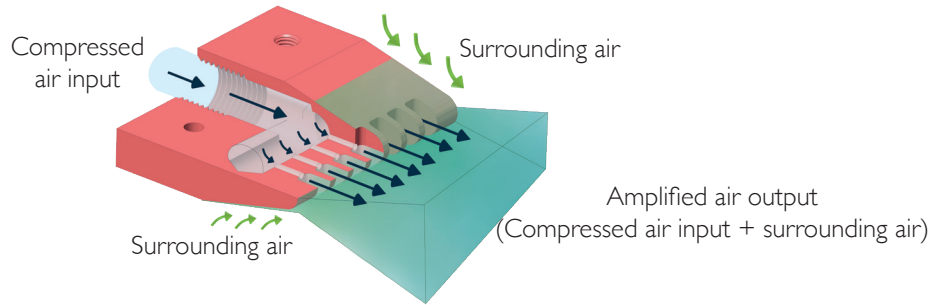

Booster

RATIO UP TO 25/1


TECHNICAL INFORMATION*

BENEFITS OF USING A BJP 14 72 AIR NOZZLE* (Compared to an open pipe)		Increase of blowing force (%)		Noise reduction (%)			
		Up to 137%		Up to 32%			
BLOWING PERFORMANCE BJP 14 72 NOZZLE*	Pressure (bar)	Air consumption (l/min)	Blowing force (N)		Noise level (dB)	Amplified blowing (l/min)	
	6	1200	at 150mm	at 450mm			
			12,5	11,2	73	6050	
VS		OPEN PIPE Ø8*					
		Pressure (bar)	Air consumption (l/min)		Noise level (dB)	Amplified blowing (l/min)	
		6	2550		108	2550	


BJP 14 72 NOZZLE FEATURES

- **Connection** : Female G1/4" • **Weight** : Aluminium : 110g / Stainless steel 316 L : 320g
- **Max. operating temperature** : Aluminium : 150°C / Stainless steel 316 L : 450°C • **Max pressure** : 10 bars


AIR CONSUMPTION
DEPENDING ON PRESSURE*

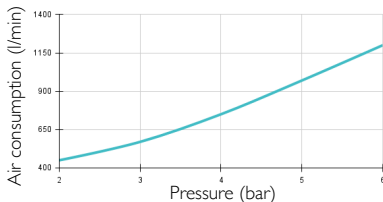



BLOWING FORCE AT 150 MM
DEPENDING ON PRESSURE*

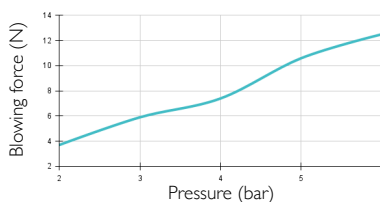

BLOWING FORCE AT 450 MM
DEPENDING ON PRESSURE*

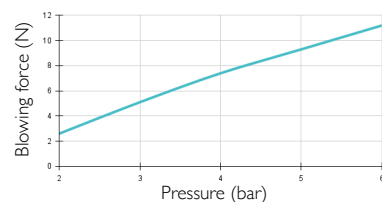


AMPLIFIED BLOWING
DEPENDING ON PRESSURE*

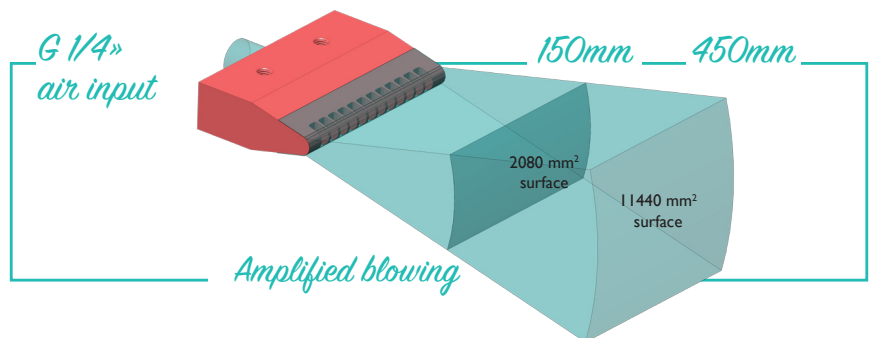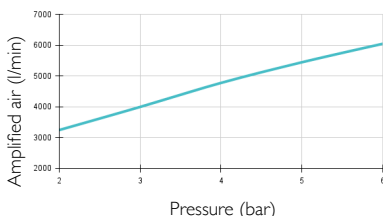

* **NOTE:** The measurements in this data sheet have been obtained in a laboratory under strict control. The varying conditions of a real industrial environment and the instability of pressure from an industrial compressor can create different values than the ones obtained in a laboratory. Those data are provided for information purposes only.
To achieve the best performance from the air nozzle, we recommend using a compressed air supply tube with a minimum 8 mm inside diameter.

DIMENSIONS

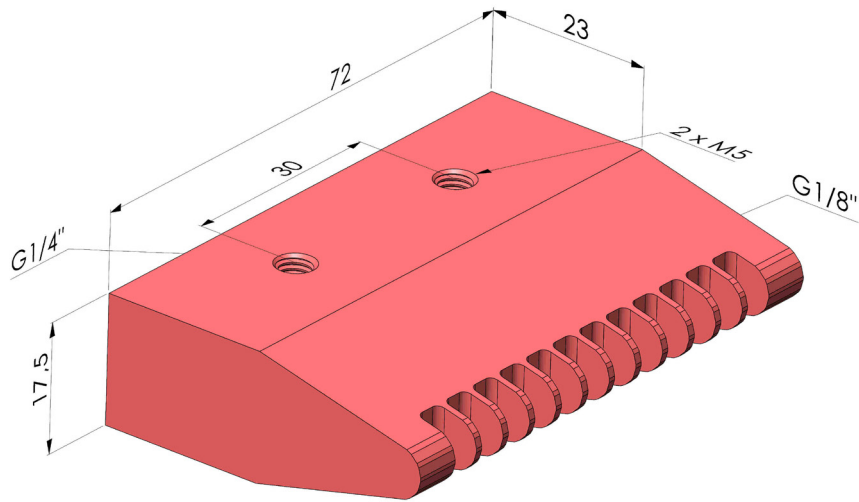

BJP 14 72 ■ Anodized aluminium

BJP 14 72 ACI ■ 316L Stainless steel

The values are given in millimeters