


BJP 90 38 102

TECHNICAL SHEET


AIR NOZZLES

FLAT AIRSTREAM

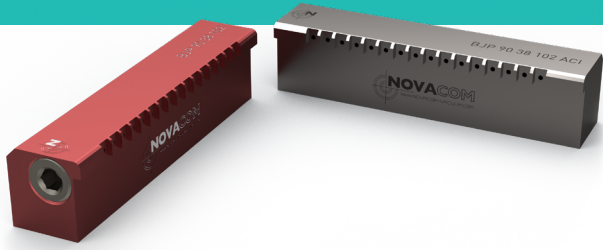

OPERATING PRINCIPAL

Booster
RATIO UP TO 25/1

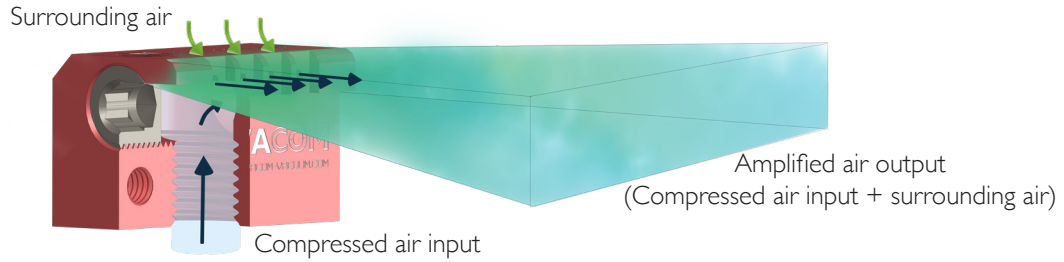


TECHNICAL INFORMATION*

BENEFITS OF USING A BJP 90 38 102 AIR NOZZLE* (Compared to an open pipe)		Increase of blowing force (%)		Noise reduction (%)		
		Up to 64%		Up to 33%		
BLOWING PERFORMANCE BJP 90 38 102 NOZZLE*	Pressure (bar)	Air consumption (l/min)	Blowing force (N)		Noise level (dB)	Amplified blowing (l/min)
	6	1720	at 150mm 17,1	at 450mm 13	74	6250
OPEN PIPE Ø12*	Pressure (bar)	Air consumption (l/min)	Noise level (dB)		Amplified blowing (l/min)	
	6	4450	110		4450	


BJP 90 38 102 NOZZLE FEATURES

- **Connection** : Female G3/8" • **Weight** : Aluminium : 104g / Stainless steel 316 L : 315g
- **Max. operating temperature** : Aluminium : 150°C / Stainless steel 316 L : 450°C • **Max pressure** : 10 bars


AIR CONSUMPTION
DEPENDING ON PRESSURE*

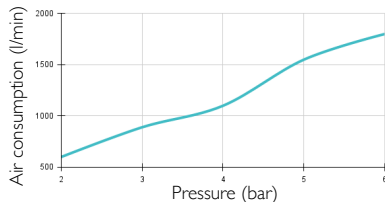



BLOWING FORCE AT 150 MM
DEPENDING ON PRESSURE*

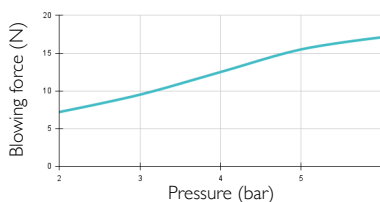

BLOWING FORCE AT 450 MM
DEPENDING ON PRESSURE*

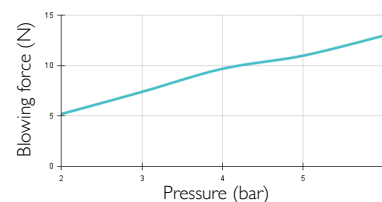


AMPLIFIED BLOWING
DEPENDING ON PRESSURE*

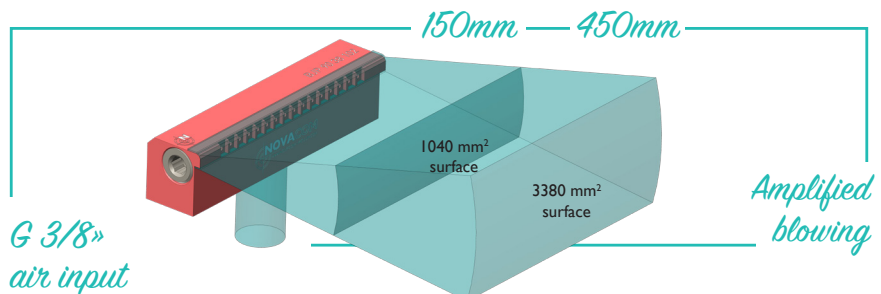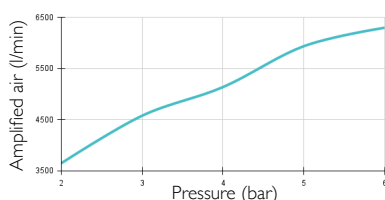

* **NOTE:** The measurements in this data sheet have been obtained in a laboratory under strict control. The varying conditions of a real industrial environment and the instability of pressure from an industrial compressor can create different values than the ones obtained in a laboratory. Those data are provided for information purposes only.
 To achieve the best performance from the air nozzle, we recommend using a compressed air supply tube with a minimum 12 mm inside diameter.

DIMENSIONS

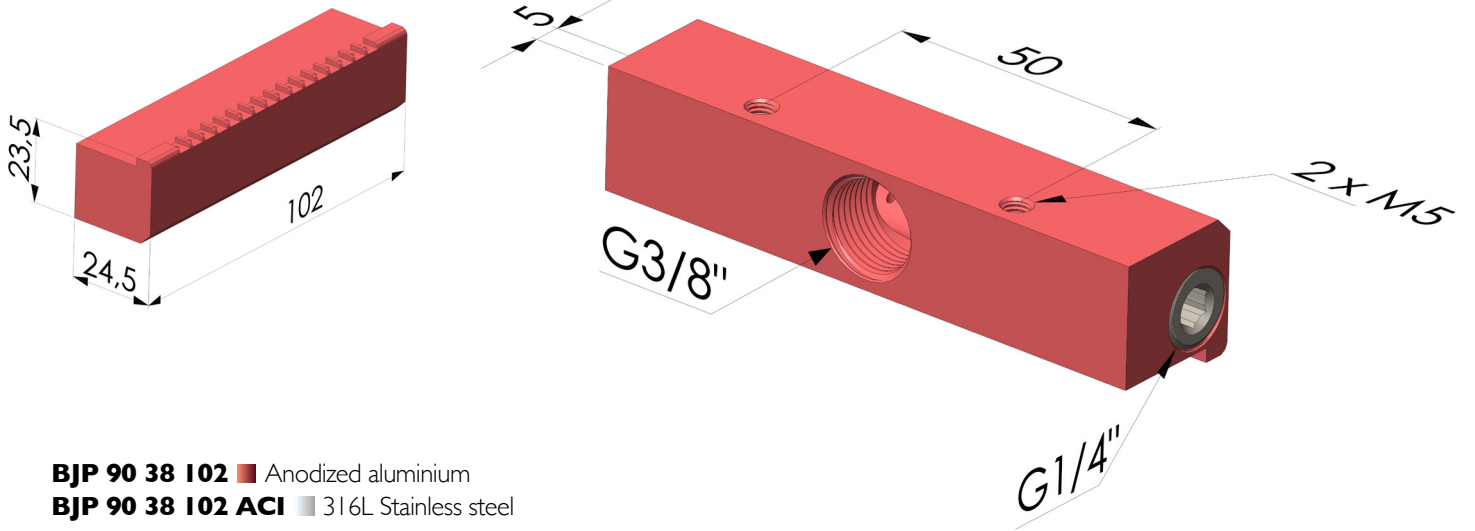

The values are given in millimeters