



# BJP 90 38 152 TECHNICAL SHEET AIR NOZZLES FLAT AIRSTREAM

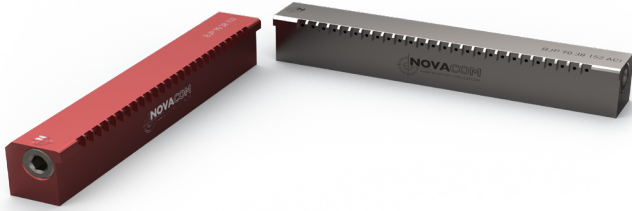

## OPERATING PRINCIPAL

**Booster**  
RATIO  
UP TO  
**25/1**

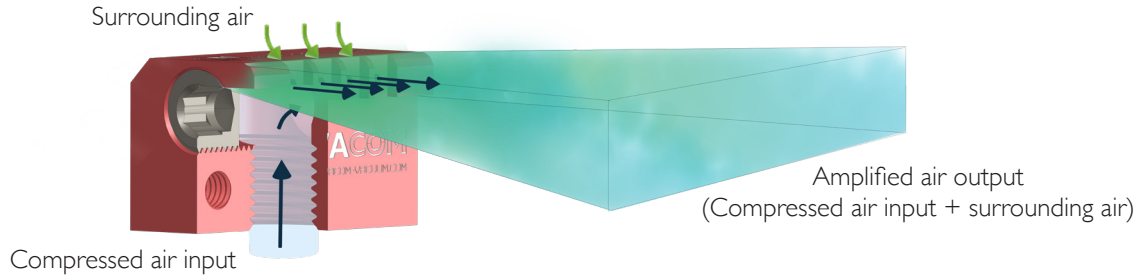


## TECHNICAL INFORMATION\*

BENEFITS OF USING A BJP 90 38 152 AIR NOZZLE* (Compared to an open pipe)		Increase of blowing force (%)		Noise reduction (%)		
		Up to <b>66%</b>		Up to <b>35%</b>		
BLOWING PERFORMANCE BJP 90 38 152 NOZZLE*	Pressure (bar)	Air consumption (l/min)	Blowing force (N)		Noise level (dB)	Amplified blowing (l/min)
	6	1895	at 150mm 22	at 450mm 20	72	6290
OPEN PIPE Ø12*	Pressure (bar)	Air consumption (l/min)		Noise level (dB)	Amplified blowing (l/min)	
	6	4550		110	4550	


## BJP 90 38 152 NOZZLE FEATURES

- **Connection** : Female G3/8" • **Weight** : Aluminium : 173.5g / Stainless steel 316 L : 480g
- **Max. operating temperature** : Aluminium : 150°C / Stainless steel 316 L : 450°C • **Max pressure** : 10 bars


**AIR CONSUMPTION  
DEPENDING ON PRESSURE\***

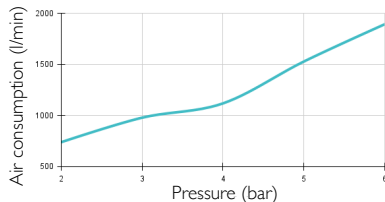



**BLOWING FORCE AT 150 MM  
DEPENDING ON PRESSURE\***

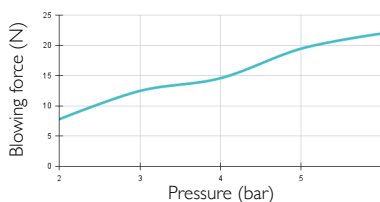

**BLOWING FORCE AT 450 MM  
DEPENDING ON PRESSURE\***

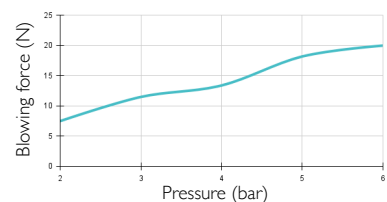

**AMPLIFIED BLOWING  
DEPENDING ON PRESSURE\***

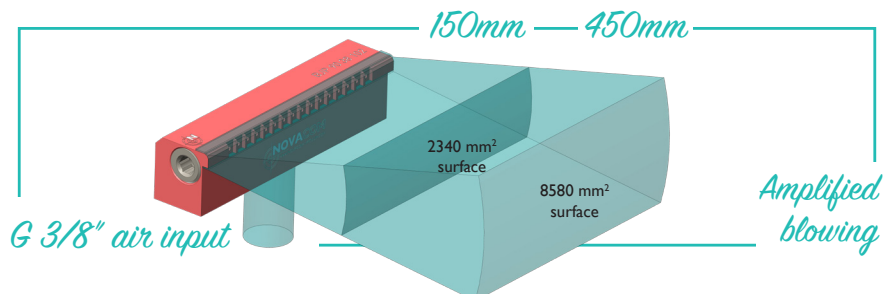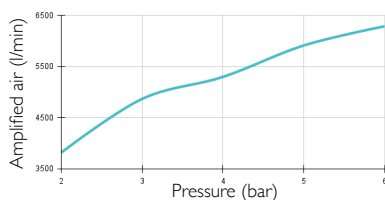

\* **NOTE:** The measurements in this data sheet have been obtained in a laboratory under strict control. The varying conditions of a real industrial environment and the instability of pressure from an industrial compressor can create different values than the ones obtained in a laboratory. Those data are provided for information purposes only.  
To achieve the best performance from the air nozzle, we recommend using a compressed air supply tube with a minimum 12 mm inside diameter.

## DIMENSIONS

