

GRIP 30 EV CS


TECHNICAL SHEET

MULTI-STAGE EJECTORS

GRIP SERIES



OPERATING PRINCIPLE

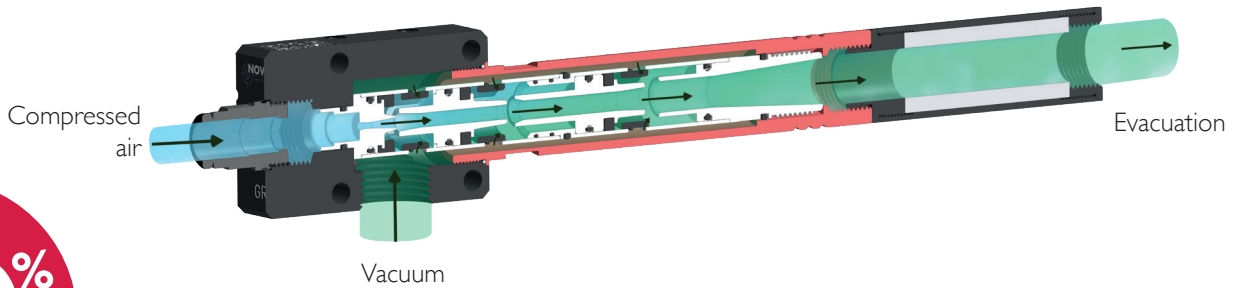

Vacuum
 UP TO
90%
 OF VACUUM


TECHNICAL INFORMATION*

BENEFITS OF USING A GRIP 30 EV CS*	Pressure (bar)	Air Consumption (NI/mn)	Noise level (dB)	Vacuum level (%)	Suction rate (NI/min)
		6	160	82	90


GRIP 30 EV CS FEATURES

- **Connection** : Female G3/8" • **Weight** : 540 g • **Max. Operating Temperature** : 60°C
- **Max pressure** : 7 bar • **Materials** : Aluminium, standard nitrile seal


AIR CONSUMPTION DEPENDING ON PRESSURE

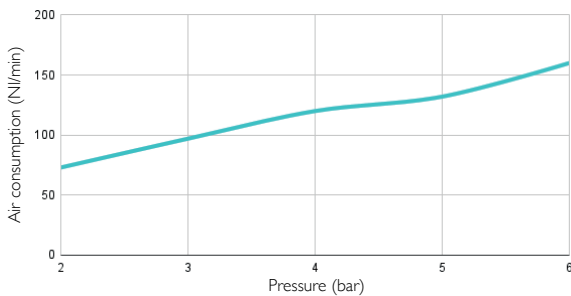


ASPIRATED AIR DEPENDING ON PRESSURE

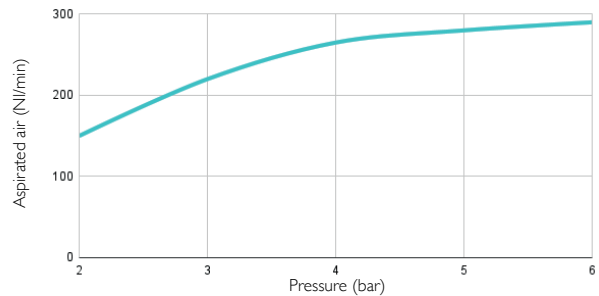

VACUUM LEVEL (%) DEPENDING ON PRESSURE

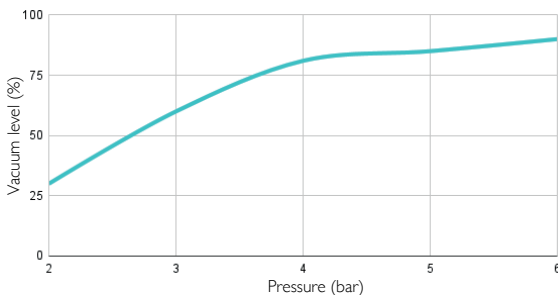


NOISE LEVEL

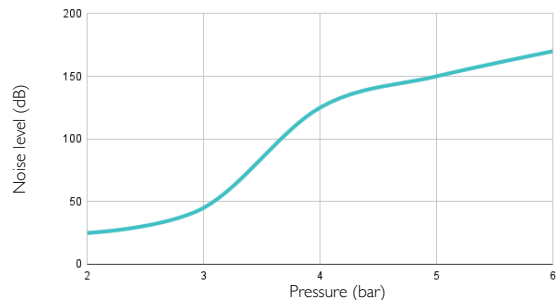


* **NOTE** : We recommend supplying the grip using a Ø 8mm tube in order to obtain optimal performance.

DIMENSIONS

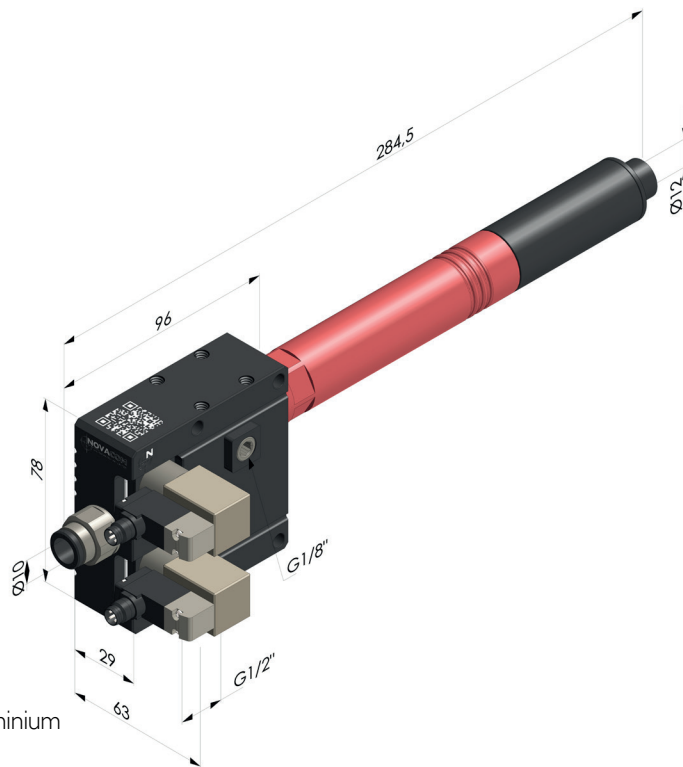


GRIP 30 EV CS ■ Aluminium

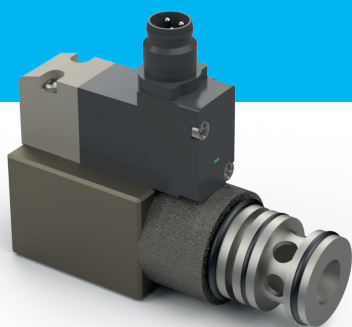


TECHNICAL SHEET SOLENOID VALVE

DIMENSIONS

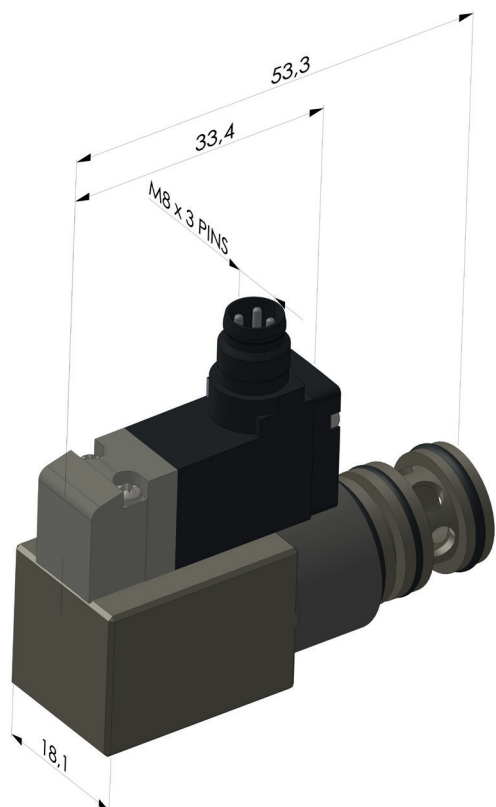

Body: brass
Operator: technopolymer
Spools: aluminium
Seals: nitrile
Pistons: aluminium
Springs: spring steel

WIRING DIAGRAM

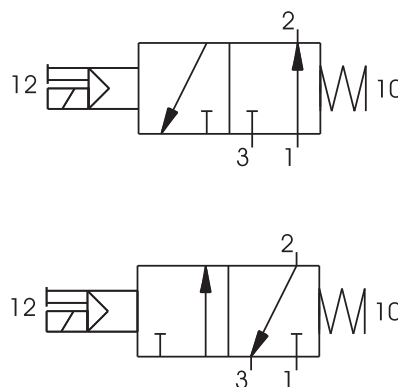

TECHNICAL INFORMATION

ITEM NUMBER	FLUID	MAX. OPERATING PRESSURE (BAR)	OPERATING TEMPERATURE (°C)	FLOW AT 6 BAR WITH $\Delta P = 1$ (NL / MIN)	WEIGHT (G)	AVAILABLE VOLTAGE	CONNECTION TYPE	CYCLE COUNT	RESPONSE TIME	
									TURNING ON	TURNING OFF
EV 24VDC 1,2W	Filtered and lubricated air	7	-10 to +60 °C	700	18	24VDC	PLUG IN M8 3 PIN - IP65 - Threaded fitting	50 000 000	12 ms	35 ms