

# VCR-2 150 14


## TECHNICAL SHEET

### SINGLE-STAGE EJECTOR

## VCR-2 SERIES



### OPERATING PRINCIPAL

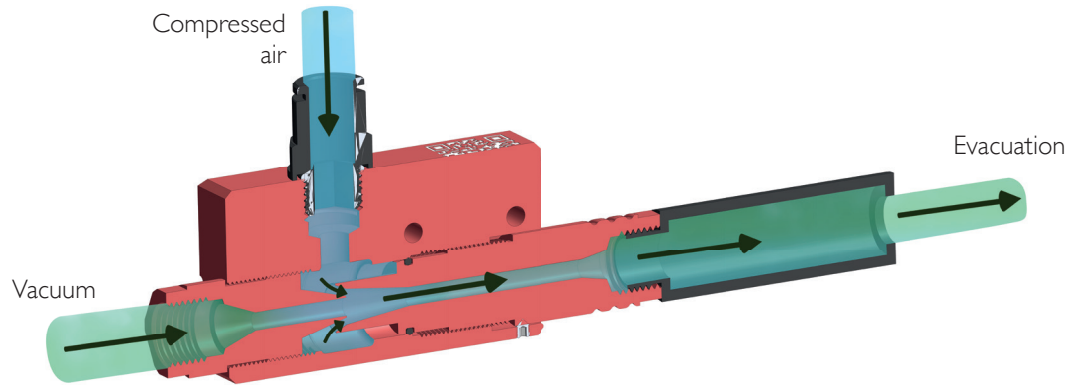

Vacuum

UP TO  
**85%**  
OF VACUUM

### TECHNICAL INFORMATION\*


**BENEFITS  
OF USING A  
SINGLE-STAGE  
EJECTOR  
VCR-2 150 14\***

Pressure (bar)	Air consumption (NI/mn)	Noise level (dB)	Vacuum level (%)	Suction rate (NI/min)
6	120	82	85	110


### VCR-2 150 14\* FEATURES

- **Connection** : Female G1/4" • **Weight** : Aluminium : 214g - Stainless Steel 316L : 580g • **Max.Operating Temperature** : 80°C
- **Max pressure** : 7 bar • **Materials** : Aluminium / Stainless Steel 316L, standard nitrile seal


**AIR CONSUMPTION DEPENDING ON PRESSURE**

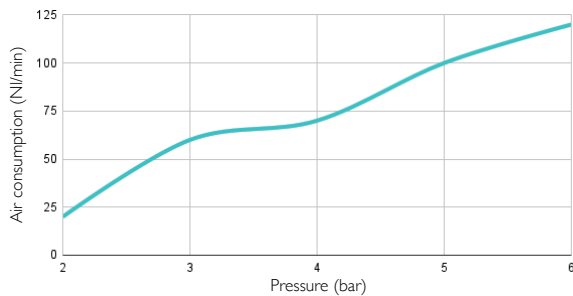


**ASPIRATED AIR DEPENDING ON PRESSURE**

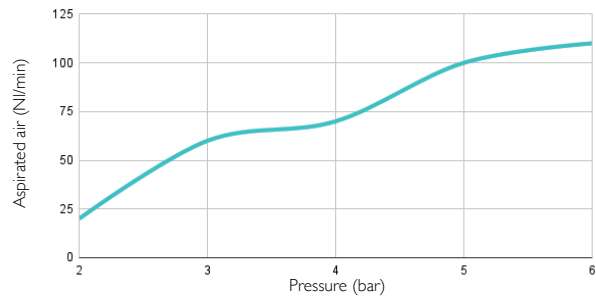

**VACUUM LEVEL (%) DEPENDING ON PRESSURE**

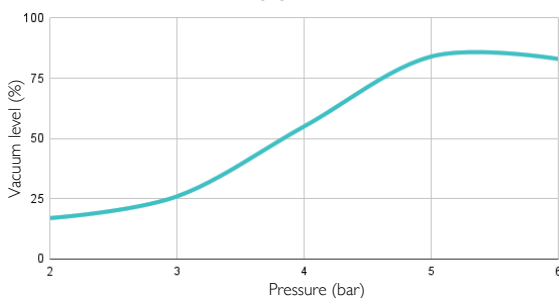


**NOISE LEVEL DEPENDING ON PRESSURE**

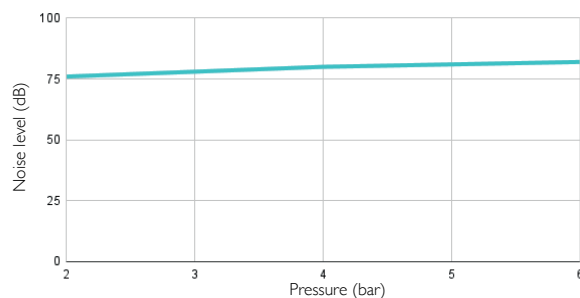

\* **NOTE** : We recommend using a Ø8mm tube to supply the VCR-2 150 14, in order to obtain optimal performances.

## DIMENSIONS

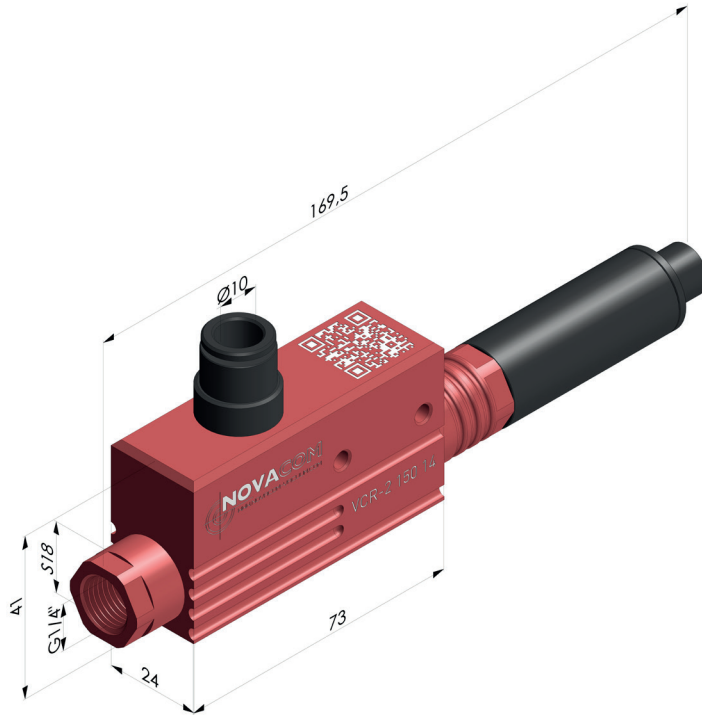

**VCR-2 150 14** ■ Aluminium

**VCR-2 150 14** ■ Stainless Steel 316L