



CVM 130X400 SV ED TECHNICAL SHEET EJECTOR VACUUM BOXES

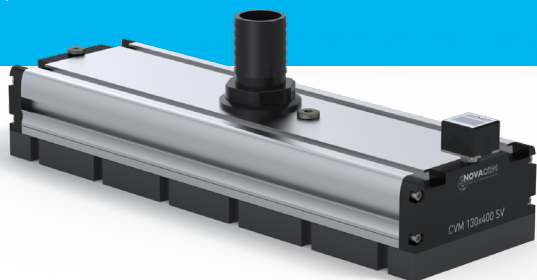

SCHEMATIC DIAGRAM

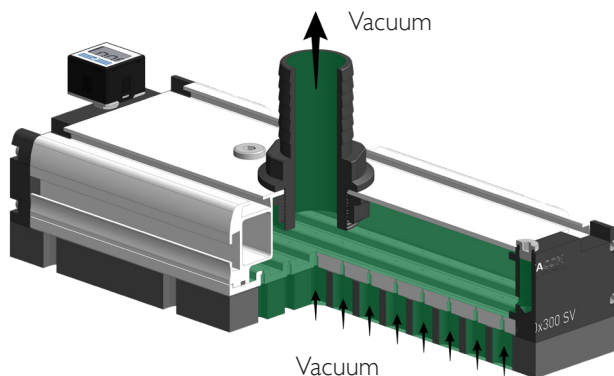

TECHNICAL INFORMATION**


CVM 130x400 SV ED	Pressure (bar)	Air consumption (NI/mn)	Noise level (dB)	Lifting force (N)	Ø inner hose	Minimum required suction flow rate (l/min)*
	-	-	-	550	40mm	900

* Minimal required recommendations : External vacuum generator with a suction flow rate of 250 l/min to 1215 l/min.

CVM 130x400 SV ED FEATURES

- Weight : 2,7 Kg • Max. Operating Temperature : 60°C
- Max pressure : 7 bar • Materials: Aluminium, standard nitrile seal; EPDM

DIMENSIONS

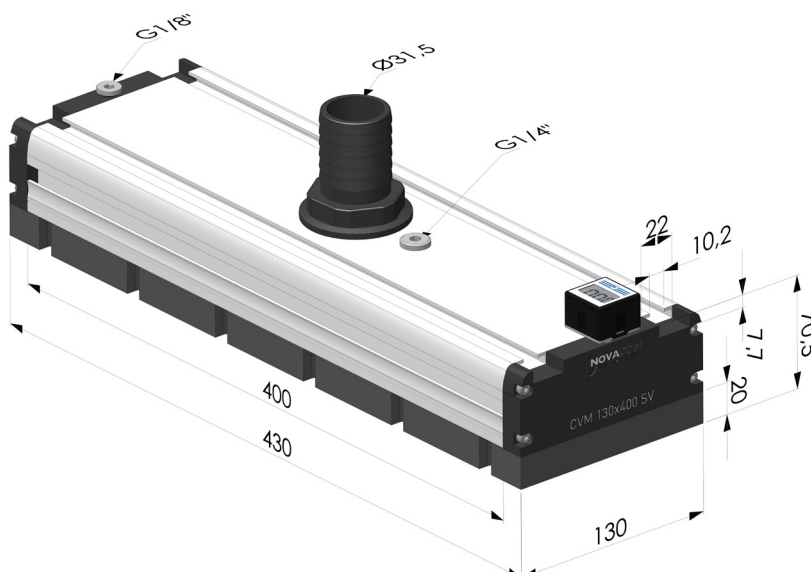

EXPLODED VIEW

- 1 Partition (x2)
- 2 CVM body (x1)
- 3 Cylindrical plug (x2)
- 4 P60VL F3 display (x1)
- 5 Supply connector (x1)
- 6 Lock-nut (x1)
- 7 Partition seal (x2)
- 8 CVM bottom (x1)
- 9 Foam band with filter (x1)
- 10 CHC M4x16 hex socket screw (x8)
- 11 FHC M4x12 flat head screw (x12)
- 12 Bottom seal of CVM (x2)

