


CVM 130X1000 SV ED TECHNICAL SHEET EJECTOR VACUUM BOXES



SCHEMATIC DIAGRAM

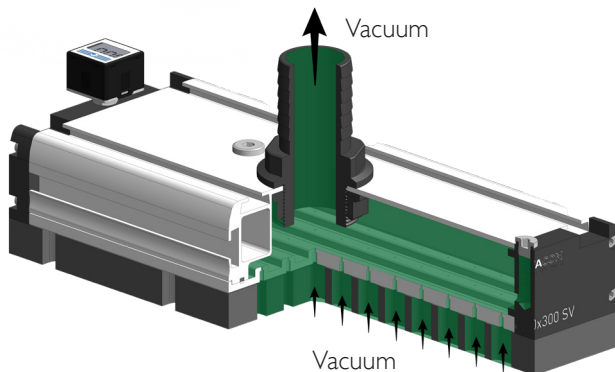

TECHNICAL INFORMATION**


| CVM 130x1000 SV ED | Pressure (bar) | Air consumption (l/min) | Noise level (dB) | Lifting force (N) | Ø inner hose | Minimum required suction flow rate (l/min)* |
|--------------------|----------------|-------------------------|------------------|-------------------|--------------|---|
| | - | - | - | 1370 | 2x 40mm | 750 |

* Minimal required recommendations : External vacuum generator with a suction flow rate of 750 l/min à 1215l/min

CVM 130x1000 SV ED FEATURES

- Weight : 6.3 Kg • Max. Operating Temperature : 60°C
- Max pressure : 7 bar • Materials : Aluminium, standard nitrile seal; EPDM

DIMENSIONS

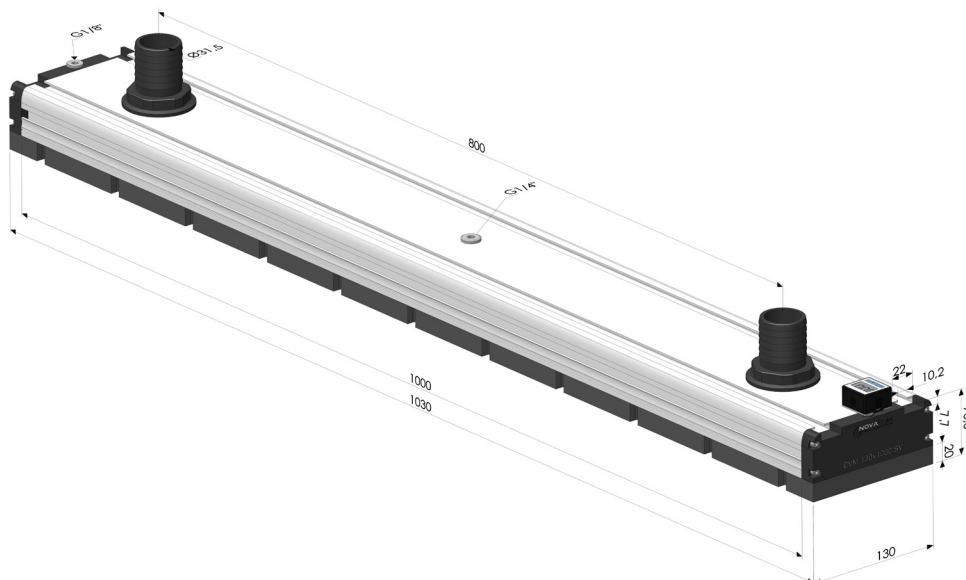

EXPLODED VIEW

- | | | | |
|----------|-----------------------|-----------|---------------------------------|
| 1 | Partition(x2) | 7 | Seal partition(x2) |
| 2 | CVM body (x1) | 8 | CVM bottom (x1) |
| 3 | Cylindrical plug (x2) | 9 | Foam band with filter (x1) |
| 4 | P60VL F3 display (x1) | 10 | CHC M4x16 hex socket screw (x8) |
| 5 | Supply connector (x2) | 11 | FHC M4x12 flat head screw (x22) |
| 6 | Lock-nut (x2) | 12 | Bottom seal of CVM (x2) |

