


CVM 130X1200 SV ED TECHNICAL SHEET EJECTOR VACUUM BOXES



SCHEMATIC DIAGRAM

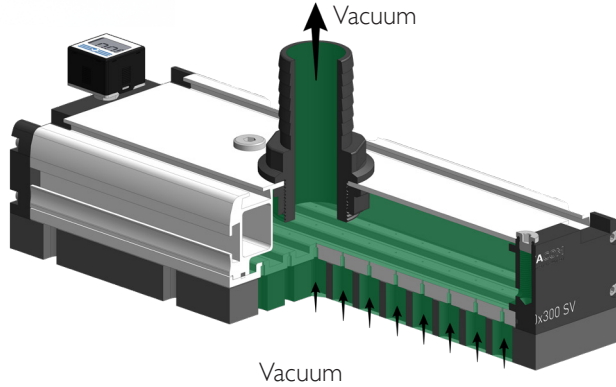

TECHNICAL INFORMATION**

CVM 130x1200 SV ED	Pressure (bar)	Air consumption (NI/mn)	Noise level (dB)	Lifting force (N)	Ø inner hose	Minimum required suction flow rate (l/min)*
	-	-	-	1650	2x 40mm	900

* Minimal required recommendations : External vacuum generator with a suction flow rate of 900 l/mn à 1215l/mn

CVM 130x1200 SV ED FEATURES

- **Weight** : 7.4 Kg • **Max. Operating Temperature** : 60°C
- **Max pressure** : 7 bar • **Materials** : Aluminium, standard nitrile seal; EPDM

DIMENSIONS



EXPLODED VIEW

- 1 Partition (x2)
- 2 CVM body (x1)
- 3 Cylindrical plug (x2)
- 4 P60VL F3 display (x1)
- 5 Supply connector (x2)
- 6 Lock-nut (x2)
- 7 Seal partition (x2)
- 8 CVM bottom (x1)
- 9 Foam band with filter (x1)
- 10 CHC M4x16 hex socket screw (x8)
- 11 FHC M4x12 flat head screw (x22)
- 12 Bottom seal of CVM (x2)

- 7 Seal partition (x2)

