


TP 19 TECHNICAL SHEET EJECTORS

PNEUMATIC TRANSPORT SERIES



OPERATING PRINCIPAL

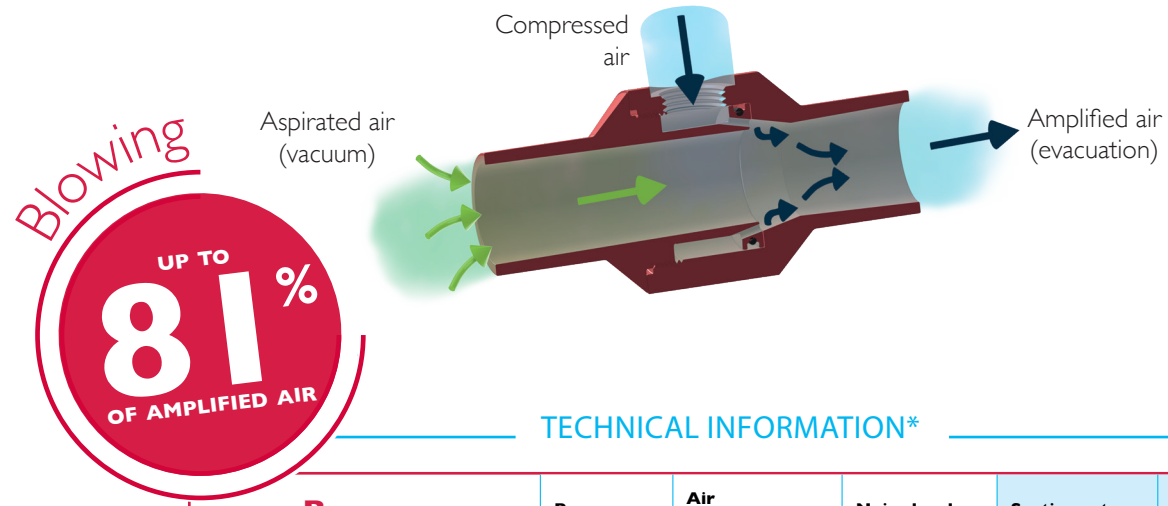


TECHNICAL INFORMATION*

BENEFITS OF USING A TP19* EJECTOR	Pressure (bar)	Air Consumption (NI/mn)	Noise level (dB)	Suction rate (NI/min)	Amplified Air (l/min)
	6	550	102	790	2210


TP 19* FEATURES

- **Connection :** Female G1/8" • **Weight :** Aluminium : 108g - Stainless Steel 316L : 322g • **Max.Operating Temperature :** Aluminium : 80°C - Stainless Steel 316L : 80°C
- **Max pressure :** 7 bar • **Materials :** Aluminium/ Stainless Steel 316L, standard nitrile seal


AIR CONSUMPTION DEPENDING ON PRESSURE

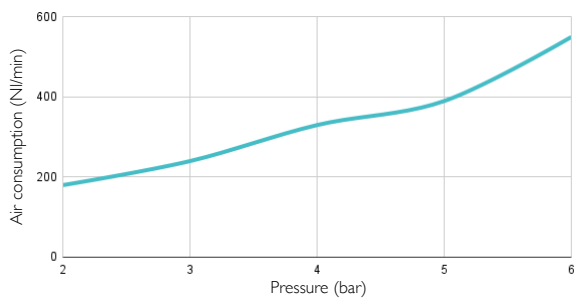


ASPIRATED AIR DEPENDING ON PRESSURE

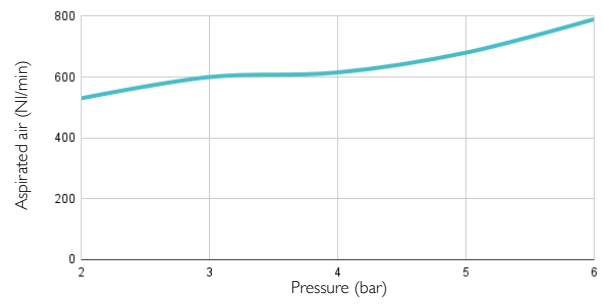

AMPLIFIED AIR DEPENDING ON PRESSURE

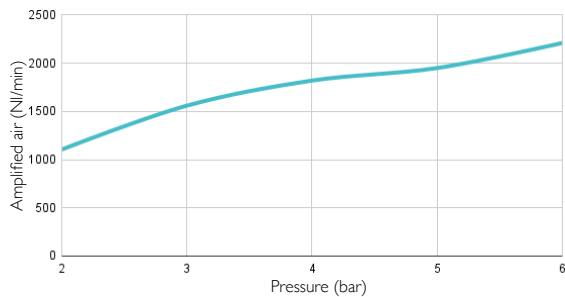


NOISE LEVEL DEPENDING ON PRESSURE

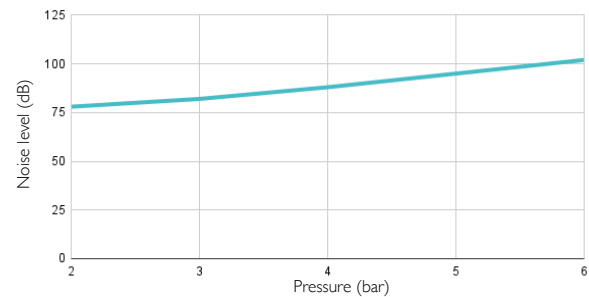

* **NOTE :** We recommend using a Øint.8mm tube to supply the TP 19, in order to obtain optimal performances.

DIMENSIONS

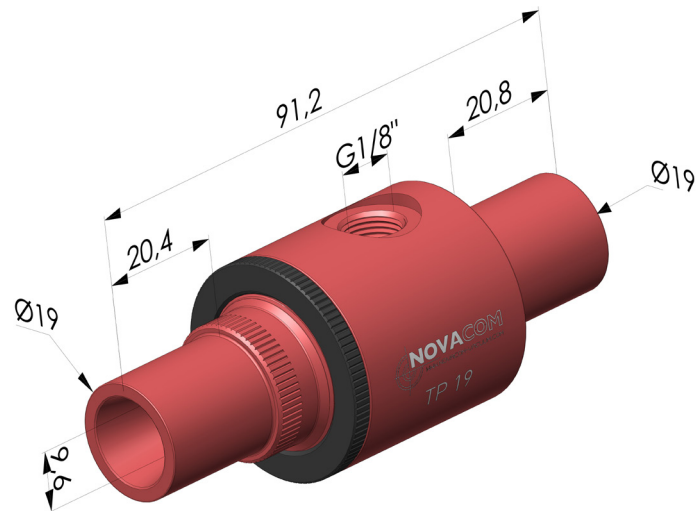

TP 19 ■ Aluminium

TP 19 ■ Stainless Steel 316L