


# TP 38 TECHNICAL SHEET EJECTORS

## PNEUMATIC TRANSPORT SERIES



### OPERATING PRINCIPAL

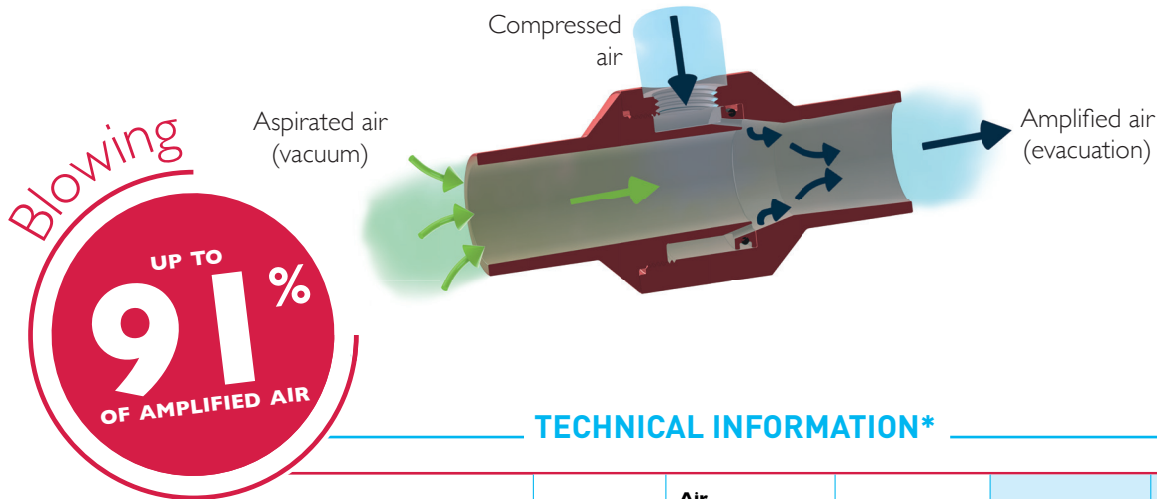


### TECHNICAL INFORMATION\*

BENEFITS OF USING A TP 38* EJECTOR	Pressure (bar)	Air Consumption (NI/mn)	Noise level (dB)	Suction rate (NI/min)	Amplified Air (l/min)
	6	790	102	7130	8556


### TP 38\* FEATURES

- **Connection :** Female G1/4" • **Weight :** Aluminium : 500g - Stainless Steel 316L : 1500g • **Max. Operating Temperature :** Aluminium : 80°C - Stainless Steel 316L: 80°C
- **Max pressure :** 7 bar • **Materials :** Aluminium / Stainless Steel 316L, standard nitrile seal


**AIR CONSUMPTION DEPENDING ON PRESSURE**

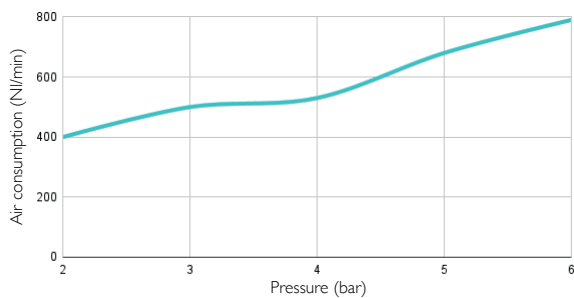


**ASPIRATED AIR DEPENDING ON PRESSURE**

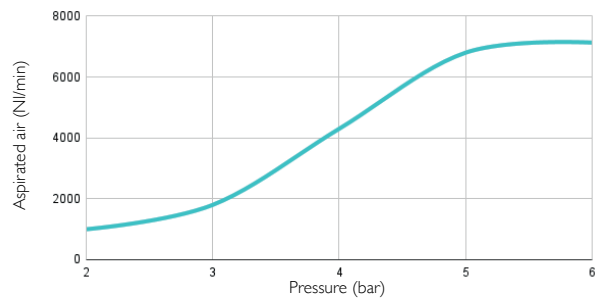

**AMPLIFIED AIR DEPENDING ON PRESSURE**

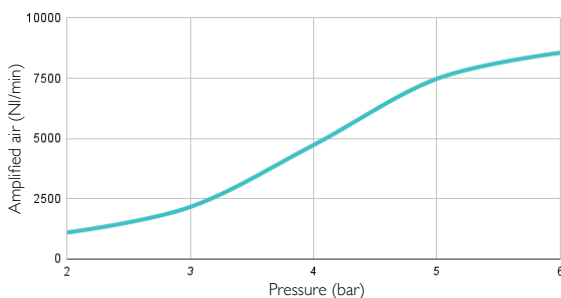


**NOISE LEVEL DEPENDING ON PRESSURE**

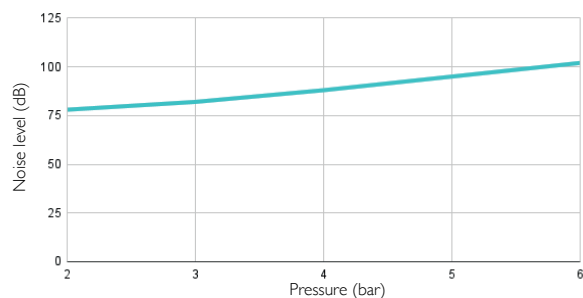

\* **NOTE :** We recommend using a Øint. 10mm tube to supply the TP 38, in order to obtain optimal performances.

## DIMENSIONS

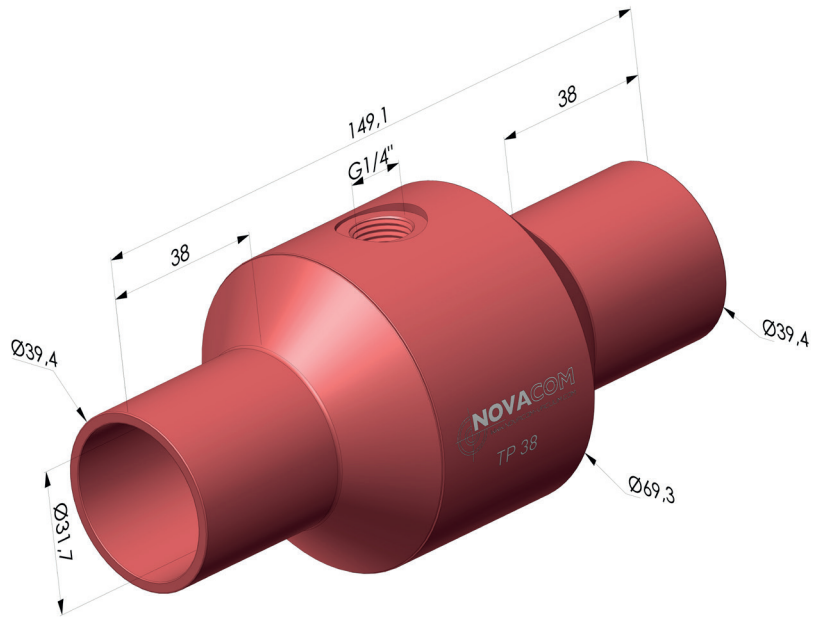

**TP 38** ■ Aluminium

**TP 38** ■ Stainless Steel 316L