


# TP 76 TECHNICAL SHEET EJECTORS

## PNEUMATIC TRANSPORT SERIES



### OPERATING PRINCIPAL

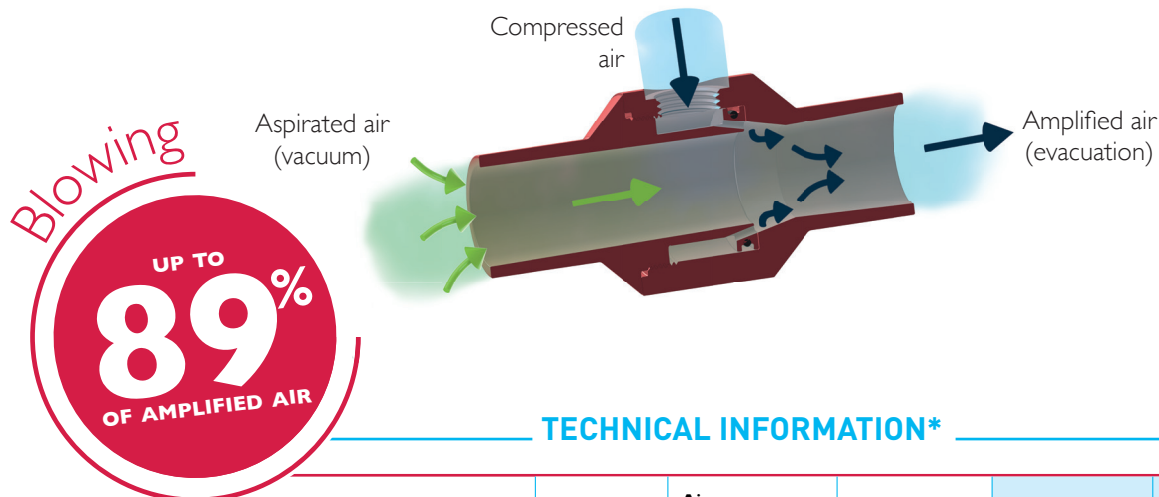


### TECHNICAL INFORMATION\*

BENEFITS OF USING A TP 76* EJECTOR	Pressure (bar)	Air Consumption (NI/mn)	Noise level (dB)	Suction rate (NI/min)	Amplified Air (l/min)
	6	930	102	8050	8855


### TP 76\* FEATURES

- **Connection** : 2x Female G3/8" • **Weight** : Aluminium : 1120g - Stainless Steel 316L : 3175g • **Max. Operating Temperature** : Aluminium : 80°C - Stainless Steel 316L : 80°C
- **Max pressure** : 7 bar • **Materials** : Aluminium / Stainless Steel 316L, standard nitrile seal


**AIR CONSUMPTION DEPENDING ON PRESSURE**

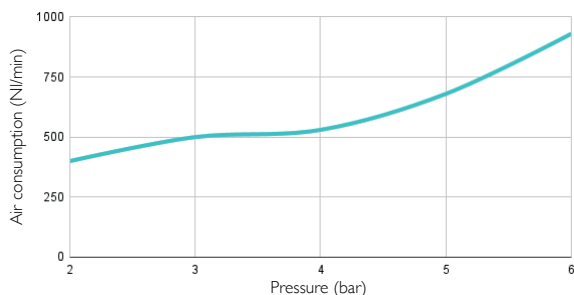


**ASPIRATED AIR DEPENDING ON PRESSURE**

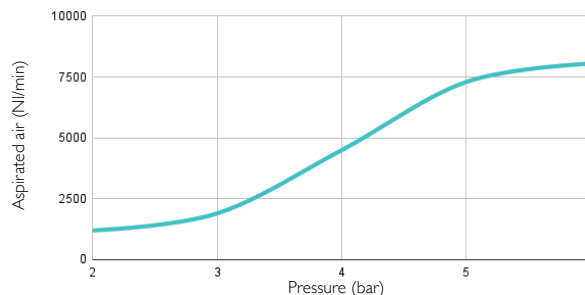

**AMPLIFIED AIR DEPENDING ON PRESSURE**

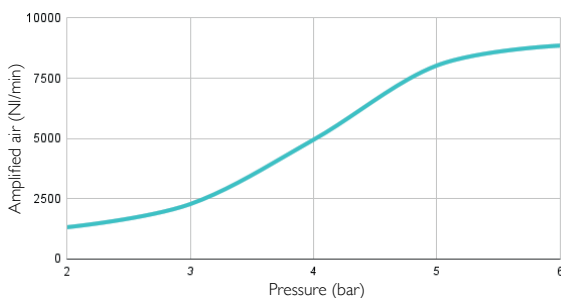


**NOISE LEVEL DEPENDING ON PRESSURE**

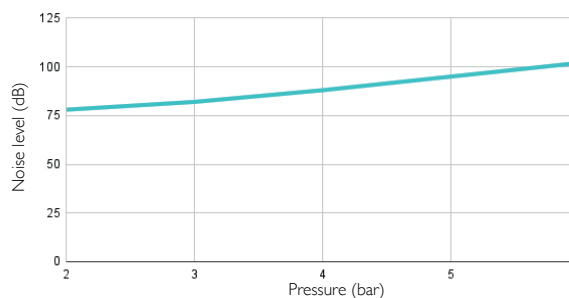

\* **NOTE** : We recommend using a Øint. 10mm tube to supply the TP 76, in order to obtain optimal performances.

## DIMENSIONS

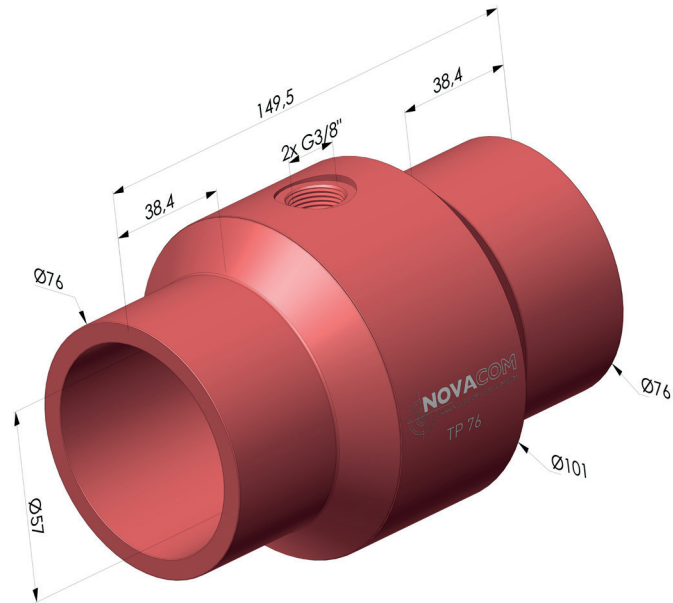

**TP 76** ■ Aluminium

**TP 76** ■ Stainless Steel 316L