





CLIM-2 EL TECHNICAL SHEET VORTEX TUBES CABINET COOLER

OPERATING PRINCIPAL

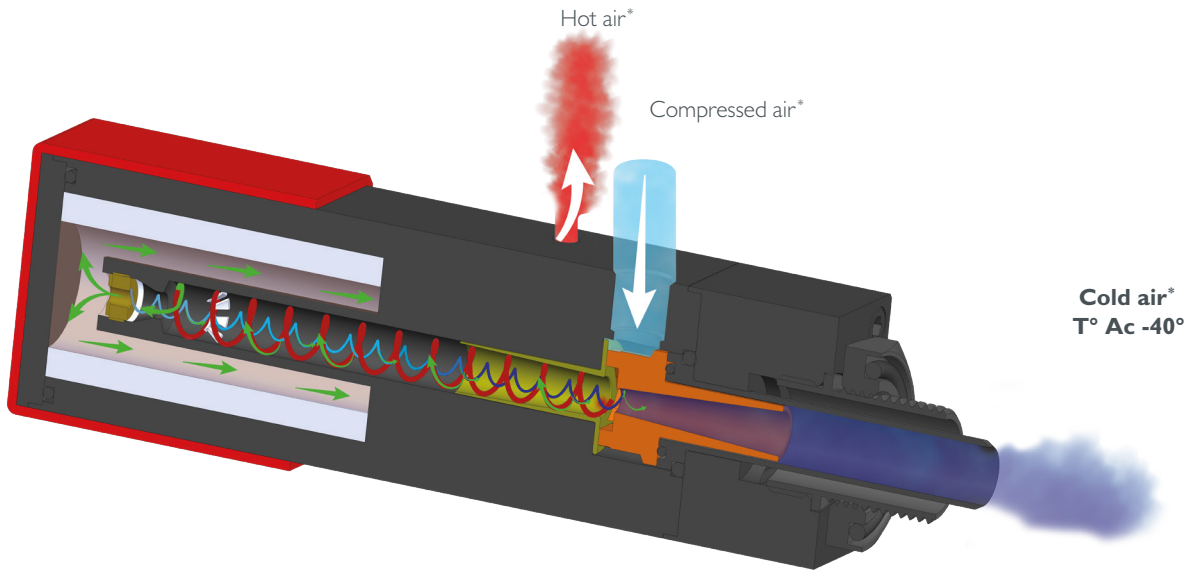


*The temperature values are given for information purposes for a CLIM 2500 item with a GEA 35R orange generator.
 T° Ac= Temperature of the compressed air



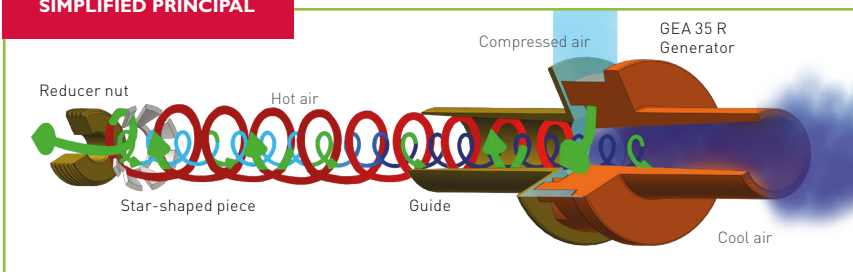

SIMPLIFIED PRINCIPAL

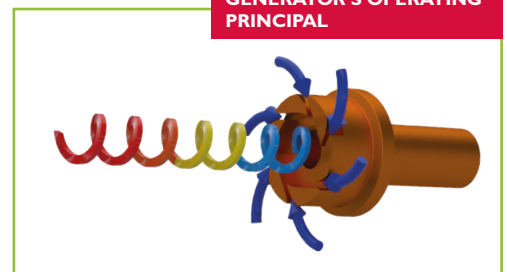

GENERATOR'S OPERATING PRINCIPAL




TECHNICAL INFORMATION

ITEM NUMBER	CONNECTION (GAZ MEASURES)	GENERATOR	COOLING CAPACITY		CONSUMED AIR (L/MN)		AIR FLOW AT OUTLET (L/MIN)		CABINET SIZE (METERS)	WEIGHT (GRAMS)	SOUND LEVEL (DB)	MATERIAL
			(Kcal/H)**	(BTU/H)	6 BARS	7 BARS	6 BARS	7 BARS				
CLIM-2 EL 500	G1/4"	GEA 10R 	95	376,99	381	430	115	152	0,5 x 0,6 x 0,2	1085	75 (ideal condition)	Aluminum
CLIM-2 EL 900	G1/4"	GEA 15R 	135	535,72	400	495	152	170	0,8 x 0,6 x 0,2			Aluminum
CLIM-2 EL 1500	G1/4"	GEA 25R 	440	1746,06	494	597	205	285	1,0 x 1,0 x 0,4			Aluminum
CLIM-2 EL 2500	G1/4"	GEA 35R 	720	2857,19	635	786	340	375	1,8 x 1,8 x 0,6			Aluminum

For optimal results, we recommend using an 8 mm inside diameter tube for CLIM-2 EL 500 and 900 items, and a 12 mm inside diameter tube for CLIM-2 EL 1500 and 2500 items..

** The kilocalorie is an energy unit, a kilocalorie (equals 1000cal) represents the quantity of energy needed to reduce the temperature of 1 °C inside 1000 liters of water.

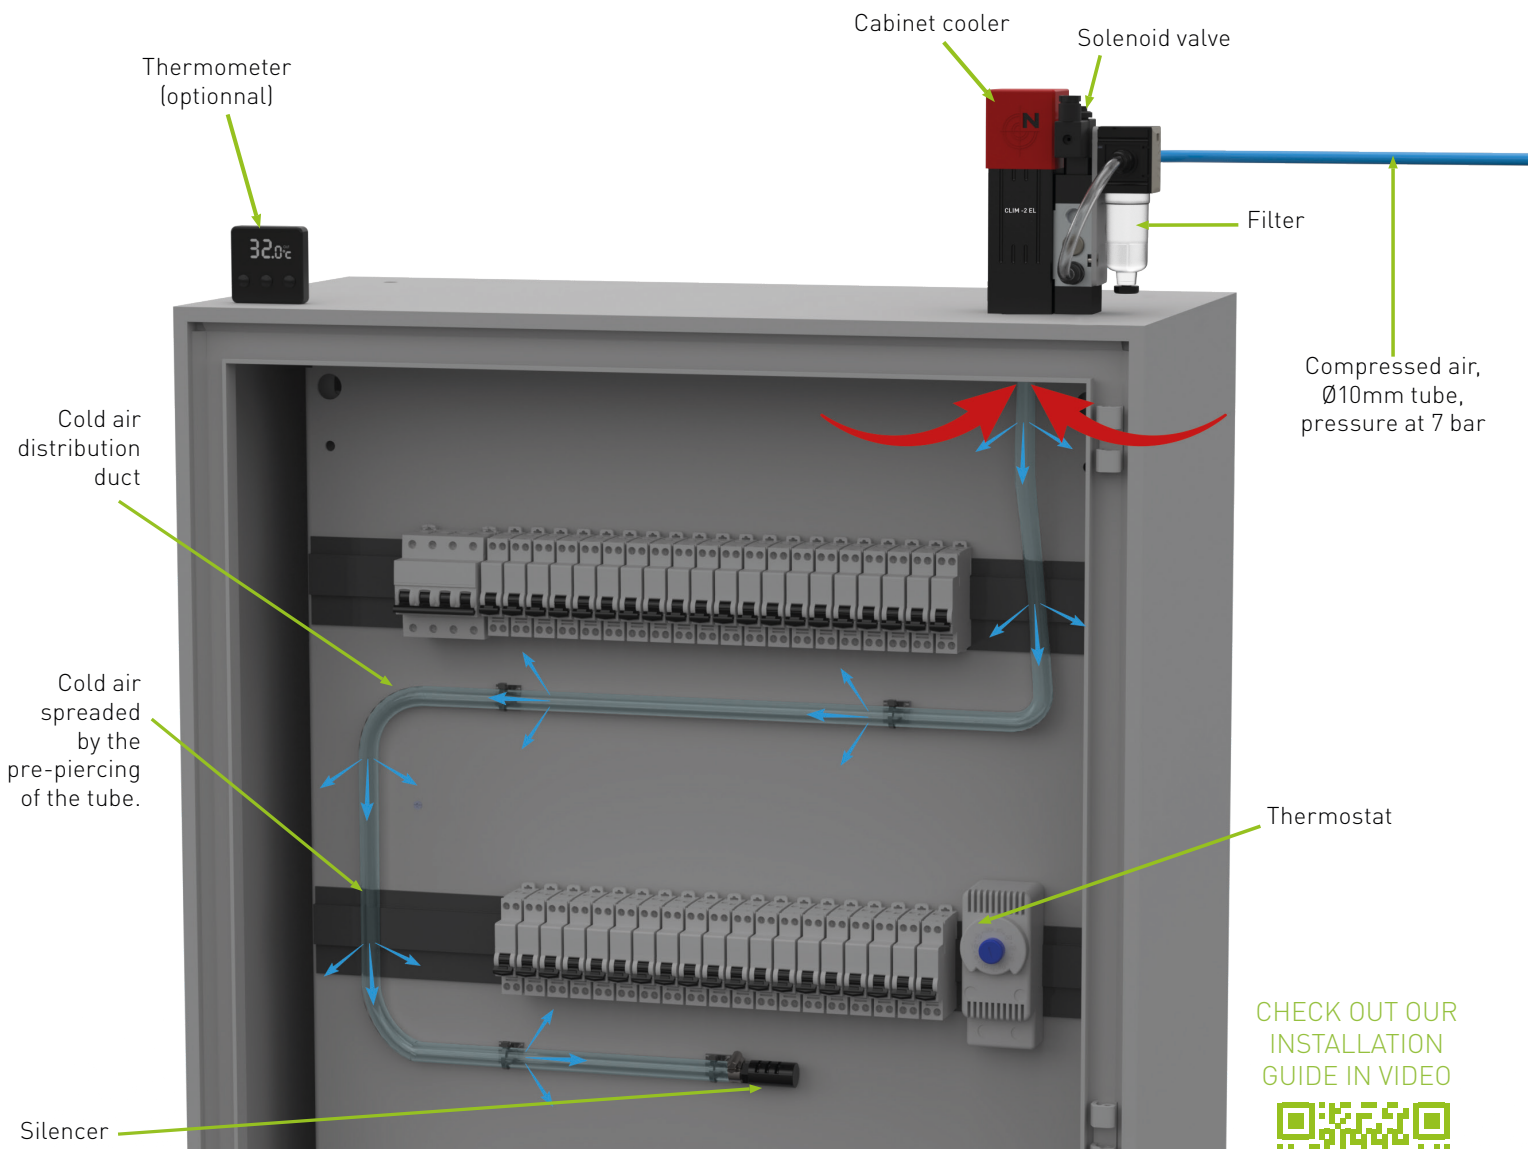


CHECK OUT OUR
INSTALLATION
GUIDE IN VIDEO



CLIM-2 EL 500 - CLIM-2 EL 900 - CLIM-2 EL 1500 - CLIM-2 EL 2500

DIMENSIONS

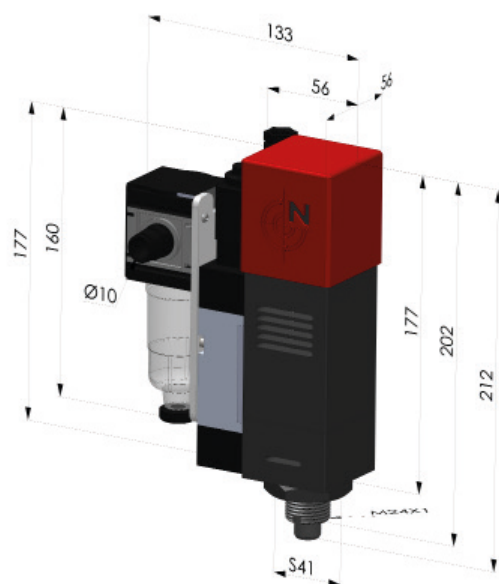


CLIM-2 EL 500
CLIM-2 EL 900
CLIM-2 EL 1500
CLIM-2 EL 2500

COLD AIR DISTRIBUTION DUCT TECHNICAL SHEET VORTEX TUBES CABINET COOLER



DESCRIPTION

PVC tube

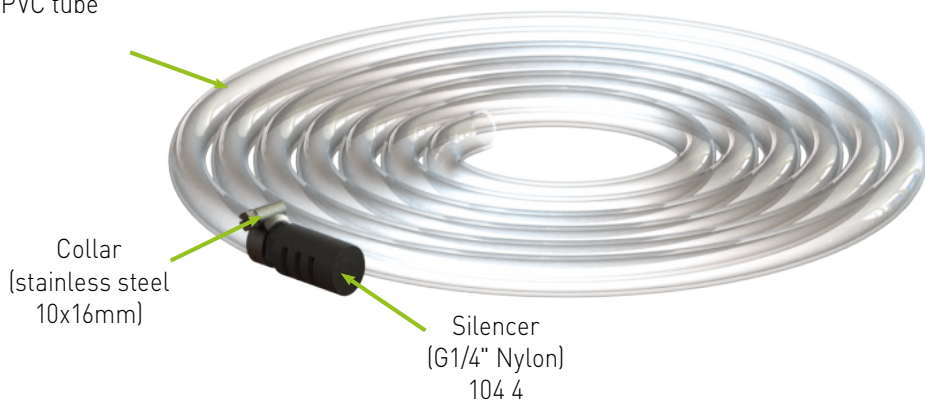

Self-adhesive
 duct ties
 (nylon 21x21mm)


Included accessories
 Possibility to request a different length for the PVC tube.

TECHNICAL INFORMATION

ITEM NUMBER	MATERIAL	DIMENSION	LENGTH
CLIM TUB	PVC	13x17mm	Max: 2,50m Adjustable length depending on the cabinet size

RECOMMENDATIONS


It is essential to make several perforations on your transparent tube, for the diffusion of cold air in the cabinet, we recommend a 5mm drill.

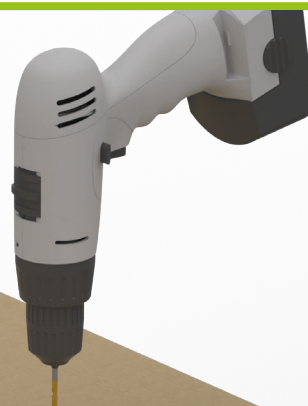



CLIM EL THERMOSTAT TECHNICAL SHEET VORTEX TUBES CABINET COOLER


DETAILED VIEW

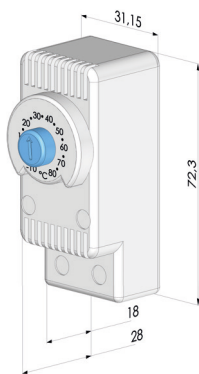

TECHNICAL INFORMATION

ITEM NUMBER	RATED VOLTAGE RANGE	RATED CURRENT (A)	SETTING RANGE (A)	DIFFERENTIAL (REFERRED TO THE SET POINT) (°C)	ACCURACY (°C)	WEIGHT (g)
CLIM THERMOSTAT NO	60 V d.c. - 110-250 V a.c.	10	15	-10 ~ 80	± 3	54g


ELECTRICAL DIAGRAM




Casing material: PA66 UL 94V-0
 Color: grey RAL 7035
 Protection degree: IP20
 Appliance class: Class II
 Assemble on: DIN rail 35mm (EN 50 022); DIN rail 15mm (EN 50 045); DIN rail 32mm (EN 50 035)
 Fixing method: Snap on
 Electrical connection: screw terminals
 Electrical wires section: from 0.75mm² to 2.5 mm²
 Sensitive element type: bi-metallic
 Setting/indexing: external knob/5°C

Storage temperature: from -40°C to +90°C
 Max air humidity: 95% RH at 25°C (not condensing)
 Temperature scale: available with Fahrenheit degree scale (°F)
 External dimensions: 68x29x45mm
 Endurance: 100 000 cycles
 Applicable standards: EN 60730-1 and UL (Underwriters Laboratories) approved, according to UL 873 and C22.2 N° 24-93 standards
 Approvals: CE, cURus

OPERATION

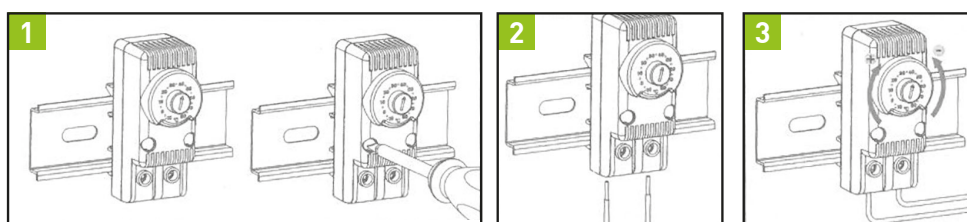

- Hook the thermostat on the rail using the proper elastic hooks. Optionally, place the thermostat in position and fix the two UNI 9707-TA 3x20 screws (not included)
- Connect the thermostat electrically (see electrical connections).
- Adjust the set point temperature by rotating the graduated disc.

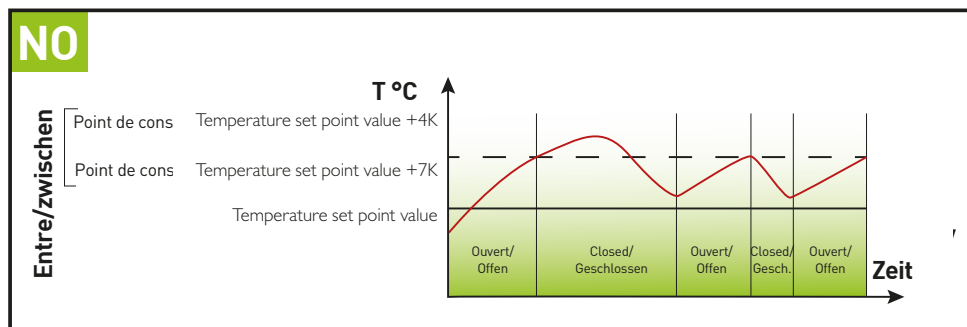


The NO thermostat (Normally open - blue) has an open contact when the temperature is below the set point value and closes when the temperature rises. The graph below shows the typical operation cycle: the contact closes with rising temperature, at value T=T set point + 4K when the rated current is 5A, or T=T set point + 7K when the rated current is > 5A. The contact opens in decrease at the value T=T set point. The set point value represents the lower limit of the setting temperature range, the upper limit represents the differential, having a value of +4K or +7K to the set point value compared.

CLIM EL FILTER TECHNICAL SHEET VORTEX TUBES CABINET COOLER



DETAILED VIEW

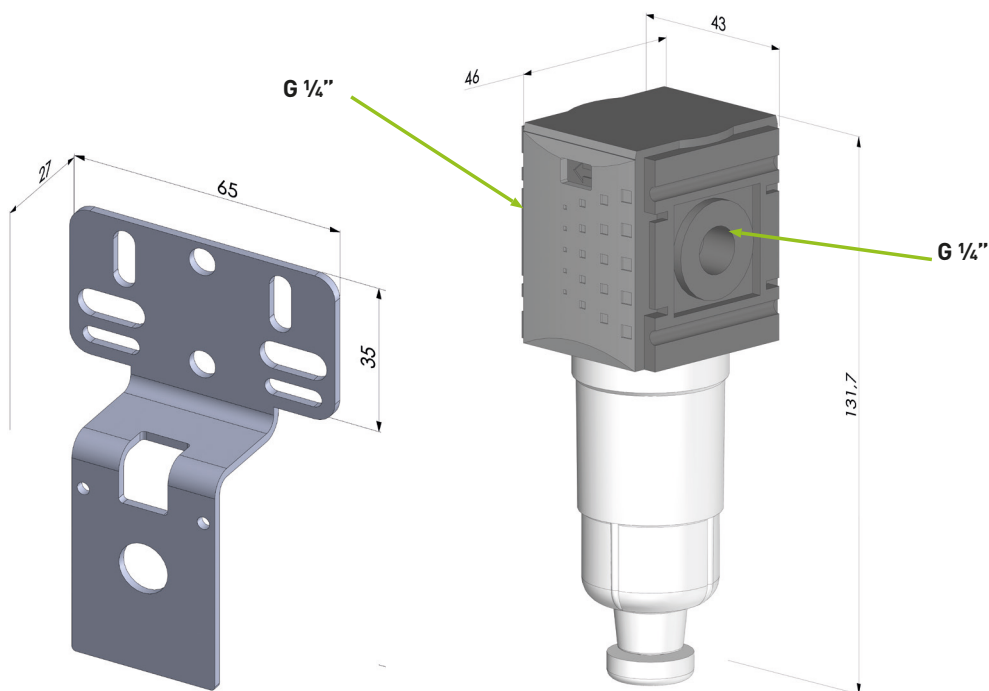

Supply pressure P1 min: 1.5 bar
 Supply pressure P1 max: 12 bar
 Temperature range: -10 ° C to + 50 ° C
 Bowl: Polycarbonate
 Emptying: semi-automatic
 Mounting: vertical
 Filter element: 5 µm

TECHNICAL INFORMATION*

ITEM NUMBER	FLOW	SUPPLY	WEIGHT(G)
CLIM FRL	1000 l/mn	G1/4"	128

ITEM NUMBER	FIXATION	MATERIAL	WEIGHT(G)
CLIM FRL sup	-	Galvanized steel	75

MOUNTING




1 Carefully remove one of the gray covers on the side of the filter.




2 Attach the rear fixing bracket, screw it to the body using the two screws supplied (2 screws 3x10 with Torx 10IP) and a wrench (not supplied).

*Model with automatic drain available on request.

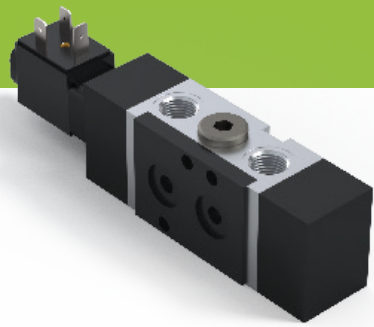

CLIM EL SOLENOID VALVE TECHNICAL SHEET VORTEX TUBES CABINET COOLER

DETAILED VIEW

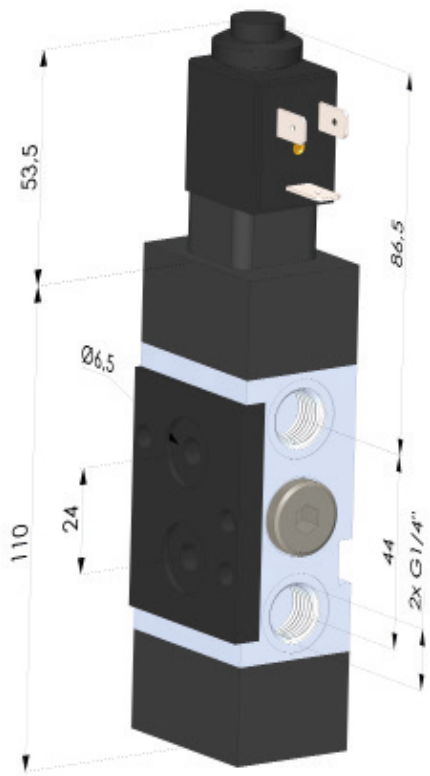

- Body: Aluminium
- Operators: Technopolymer/
Aluminium for spring bottom plates
- Spools: Aluminium
- Seals: Nitrile
- Pistons: Technopolymer
- Springs: Spring steel

WIRING



TECHNICAL INFORMATION

ITEM NUMBER	FLUID	MAX WORKING PRESSURE (BAR)	OPERATING PRESSURE (°C)	FLOW AT 6 BAR WITH ΔP = 1 (NL / MIN)	ORIFICE SIZE (MM)	WORKING PORT SIZE	WEIGHT (G)	VOLTAGE AVAILABLE
CLIM EV 1/4	Filtered air	10	-5 à +50 °C	1100	8	G1/4"	380	220 V 110 V 48 V 24 V 24 VDC

OPERATION

These valves have an average life of 15 million cycles depending on the application and air quality, filtered and lubricated air using specified lubricants will dramatically reduce the wear of the seals and ensures long and trouble free operation. Please ensure that the valve is being used according with the manufacturers specification, such as air pressure and temperature and that exhaust ports 3 & 5 are


protected against the possible ingress of dirt or debris. Repair kits including the spool complete with seals are available for overhauling the valves; however, although this is a simple operation it should be carried out by a competent person.

This model is NC (Normally open) in 220V, other functions and voltages on request

CLIM EL DIGITAL THERMOMETER TECHNICAL SHEET VORTEX TUBES CABINET COOLER




DETAILED VIEW

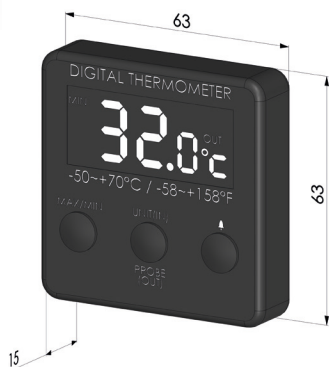

TECHNICAL INFORMATION

ITEM NUMBER	MEASURING RANGE	DISPLAY RESOLUTION	PROBE LENGTH	DIFFERENTIAL (REFERRED TO THE SET POINT)	ACCURACY (°C)	WEIGHT (G)
CLIM THERMOMETER	-20 to +50°C/-20 bis + 50°C	0.1	2M	-20 ~ +70	± 1	82

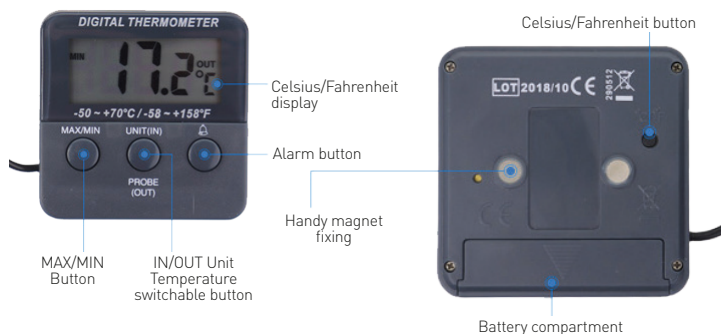

Digital thermometer with max min temperature feature and high/low temperature warning alarm setting. Ideally suited to read temperature in a fridge or freezer or any outdoor temperature and room temperature simultaneously. Magnet fixation.

Features
 High/Low temperature alarm setting (External probe reading only)
 Max/Min temperature memory
 Waterproof temperature sensor
 C° and F switchable
 Magnetic fixing on the back of the main unit

Specification
 Measuring Range: -20 to +50C&F (room temperature) / -50 to +70C&F (external probe temperature)
 Accuracy: +/- 1C
 Display Resolution: 0.1
 Display Reading Update: 10 seconds
 Battery: 1 x AAA (Supplied)
 Probe Length: 2 metres

OPERATION

1 °C/°F Exchange

Press [°C/°F] on the back of instrument to select temperature unit

2 Max/Min reading memory

- Press [Max/min] to display maximum measured value (MAX).
- Press the button again to display minimum measured value (MIN)
- Press the button again to return to nominal display
- Press and hold [Max/min] for about 2 seconds to reset memory

3 Probe sensor temperature display

- Press [IN/OUT] to display probe sensor temperature

- Press the button again to display main unit temperature reading

4 High/Low temperature alarm setting (external probe sensor only)

- Press and hold [] for about 2 seconds, the HIGH and OUT icons will flash
 - Press [°C/°F] on the back of instrument to set alarm high limit
 - Press [] again, the LOW and OUT icons will flash
 - Press [°C/°F] on the back of the instrument to set alarm low limit
 - Press [] once more to finish setting and return to main unit reading
- During limit setting, holding down [°C/°F] will advance the value automatically. If the probe sensor reading is out of the set

limit, the alarm will sound.

5 Alarm on/off

- Press [] to switch off alarm (AL off)
- Press [] again to switch on alarm (AL on)


NOTE

The IN reading relates to the sensor on the main unit.
 The OUT reading relates to the external probe sensor reading.
 Keep out of direct sunlight, rain or extreme heat.

90° ADAPTER FOR CLIM EL TECHNICAL SHEET VORTEX TUBES CABINET COOLER




DETAILED VIEW

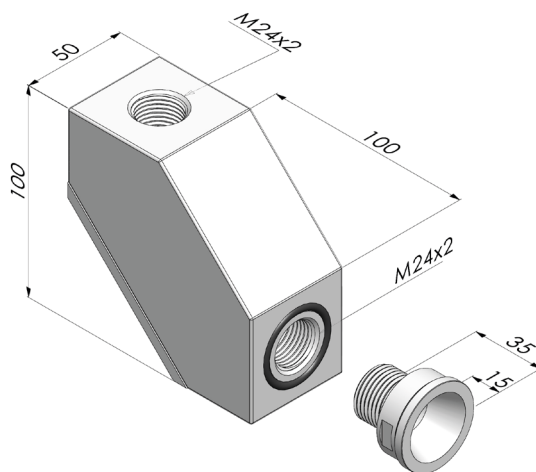

TECHNICAL INFORMATION

ITEM NUMBER	MATERIAL	WEIGHT (g)
CLIM ADA 90	Anodized aluminum	550


OPERATION

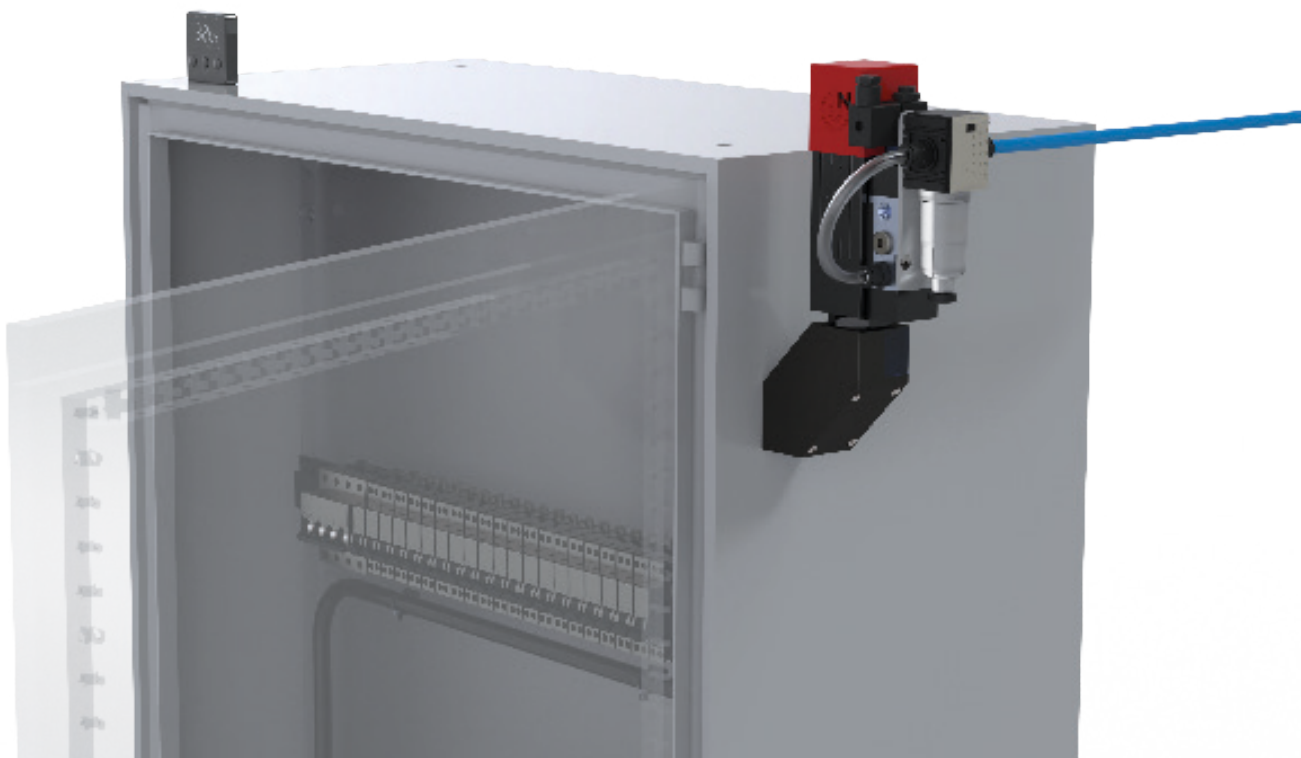


CLIM EL SET-UP TECHNICAL SHEET VORTEX TUBES CABINET COOLER

SET-UP PROCEDURE


A Using a 2.5 Allen key, unscrew the four FHC M4x12 screws from the lid. Unscrew the connector **5** and screw the cooler **2** onto the support **3**.

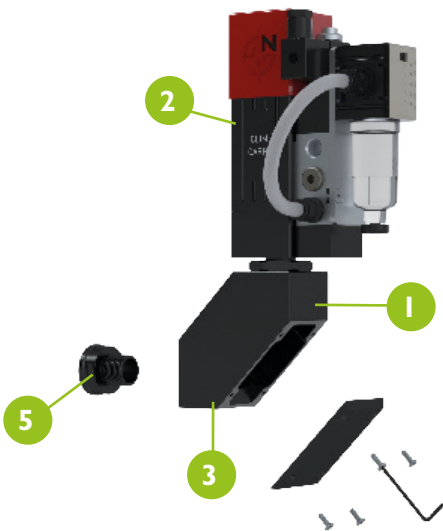

B Insert the tube **4** through the connector and support and inside the cooler **2** up to the stop.

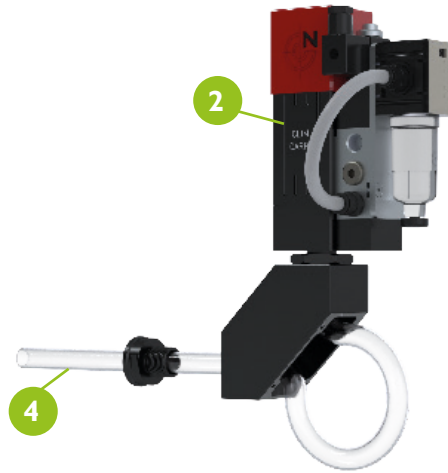

C **WARNING:** Ensure that the tube **4** is not folded, as this could reduce the performance of the cooler.

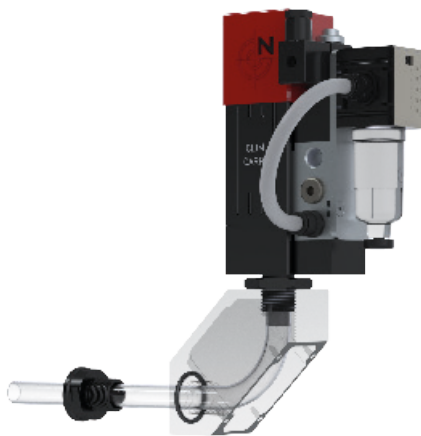

D Screw back the lid into the support and install the assembly on the electrical cabinet.

