

# VCR-2 150 14


## TECHNICAL SHEET

### SINGLE-STAGE EJECTOR

## VCR-2 SERIES



### OPERATING PRINCIPAL

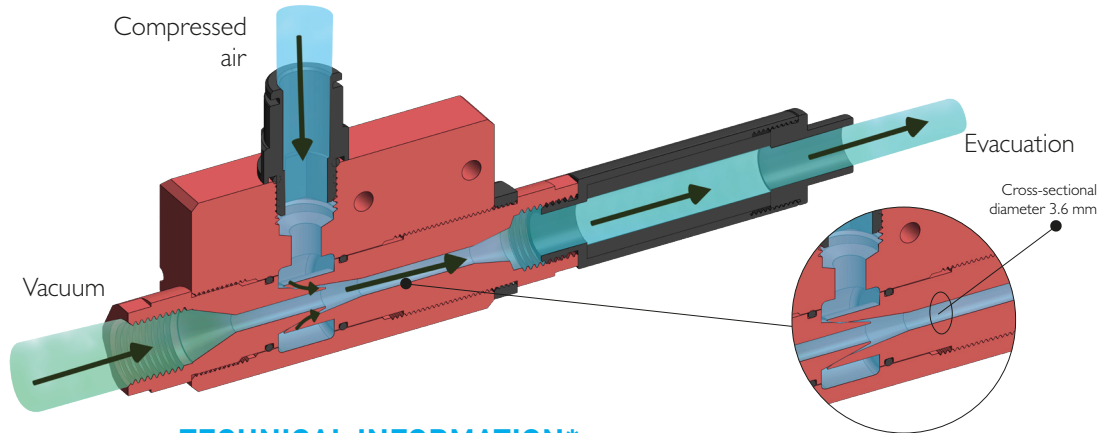

Vacuum

UP TO

# 85%

OF VACUUM

### TECHNICAL INFORMATION\*


**BENEFITS OF USING A SINGLE-STAGE EJECTOR VCR-2 150 14\***

Pressure (bar)	Air consumption (NI/mn)	Noise level (dB)	Vacuum level (%)	Suction rate (NI/min)
6	120	82	85	110


### VCR-2 150 14\* FEATURES

- Connection : Female G1/4" • Weight : Aluminium : 214g - Stainless Steel 316L : 580g • Max.Operating Temperature : 80°C
- Max pressure : 7 bar • Materials : Aluminium / Stainless Steel 316L, standard nitrile seal


**AIR CONSUMPTION DEPENDING ON PRESSURE**

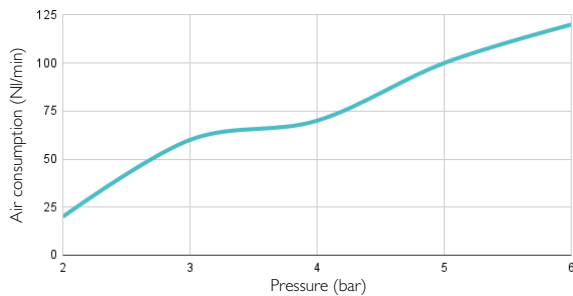


**ASPIRATED AIR DEPENDING ON PRESSURE**

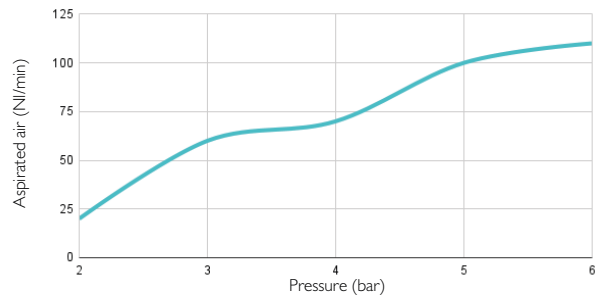

**VACUUM LEVEL (%) DEPENDING ON PRESSURE**

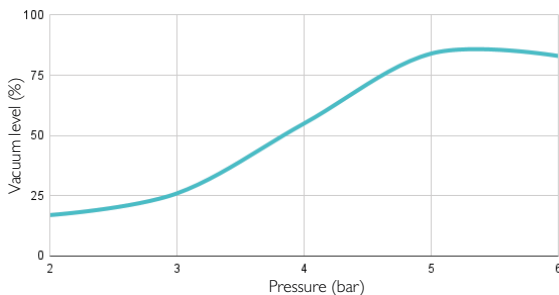


**NOISE LEVEL DEPENDING ON PRESSURE**

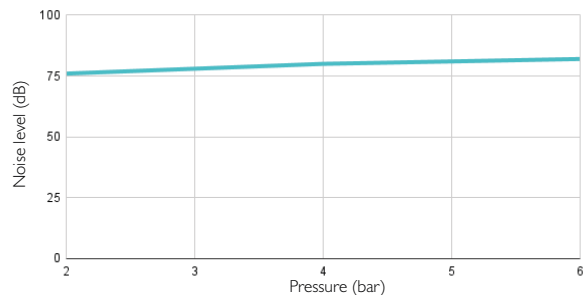

\* NOTE : We recommend using a Ø8mm tube to supply the VCR-2 150 14, in order to obtain optimal performances.

## DIMENSIONS

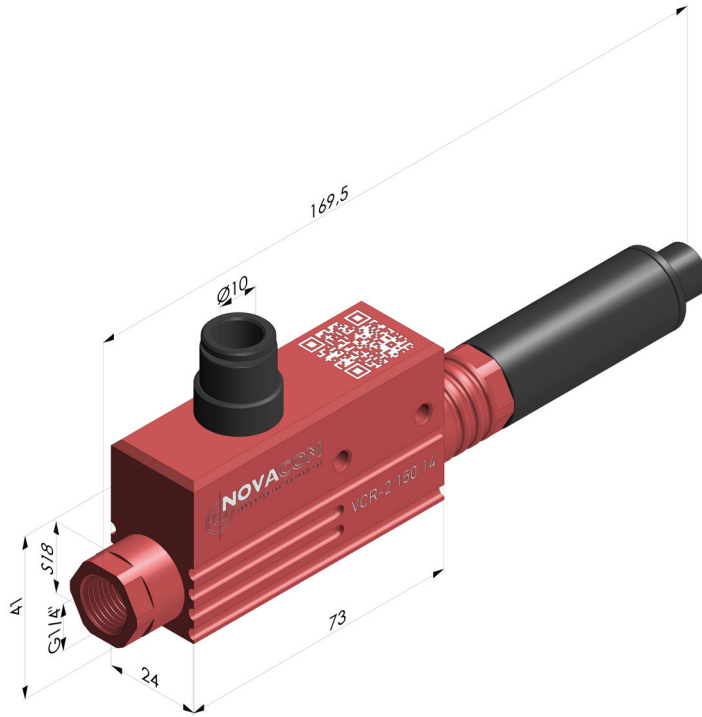

**VCR-2 150 14**  Aluminium  
**VCR-2 150 14**  Stainless Steel 316L