




BSR 38 30

TECHNICAL SHEET

ROTARY BLOW-OFF NOZZLE

OPERATING PRINCIPAL

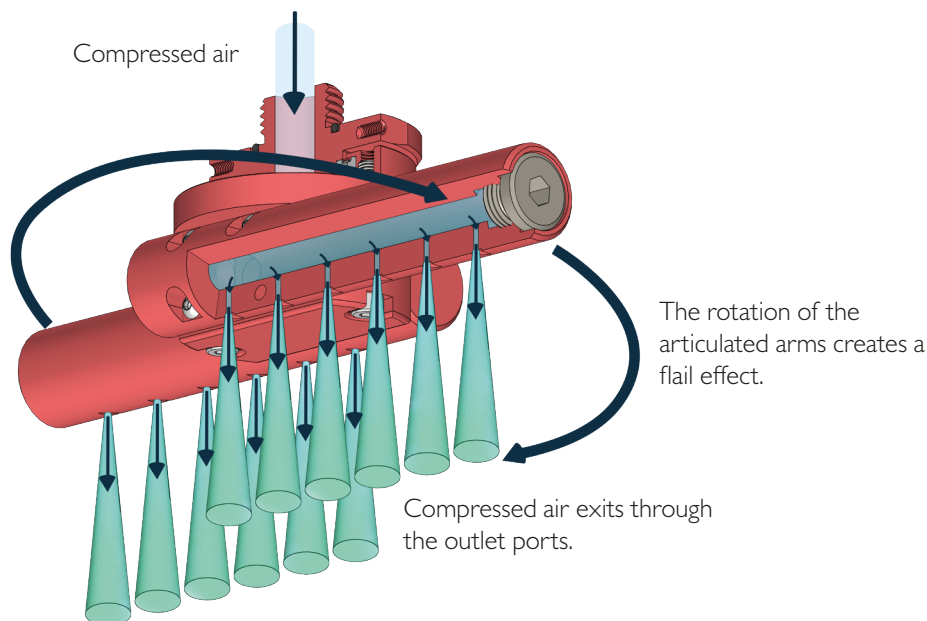



UP TO
-93%
REDUCTION IN AIR
CONSUMPTION

TECHNICAL INFORMATION

BENEFITS OF USING THE BSR 38 30 BLOW-OFF NOZZLE* (Compared with an internal Ø10 mm hose)	Reduction in air consumption (%)		Noise reduction(%)	
	Up to -93%		Up to -22%	
BSR 38 30 BLOW-OFF NOZZLE PERFORMANCE	Pressure (bar)	Air consumption (l/min)	Sound level(dB)	
	2	71	86	
	6	236	97	

BSR 38 30 Blow-Off Nozzle Specifications


- Connection : Male G3/8" • Weight : Aluminium : 140,65g
- Max. operating temperature : Aluminium : 150 °C • Max pressure : 6 bar

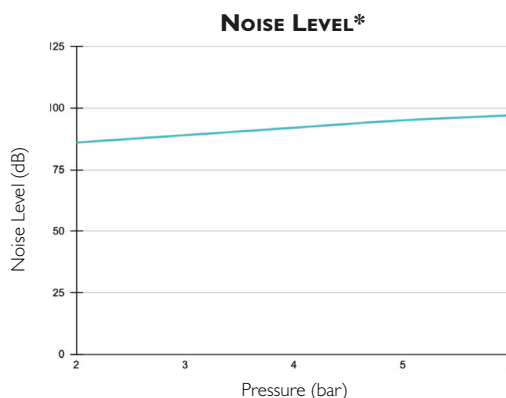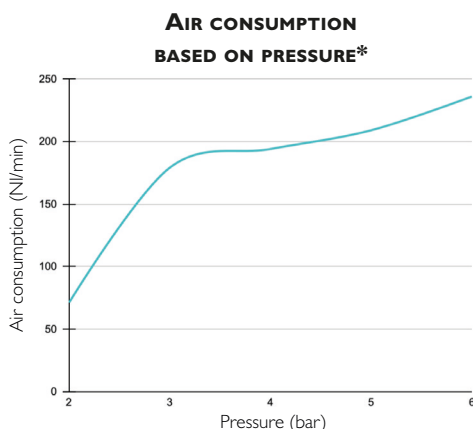

NOTE: The measurements presented in this technical sheet were carried out in a laboratory under strictly controlled conditions. It is important to note that conditions in a real industrial environment may differ, and that pressure instability from an industrial compressor may lead to values different from those obtained in the laboratory. These data are provided for information purposes only.

To achieve optimal performance from the rotary blow-off nozzle, we recommend using a compressed-air supply hose with a minimum internal diameter of 10 mm.

DIMENSIONS

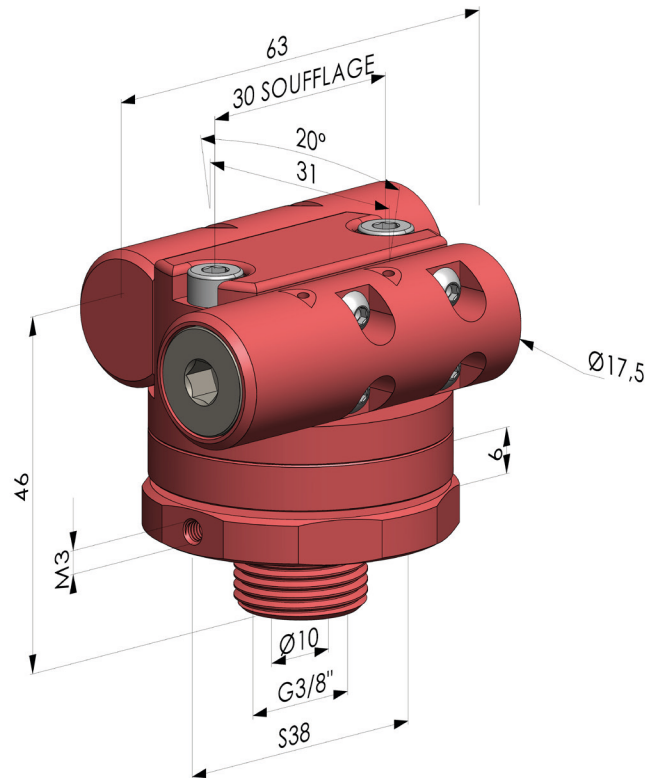

BSR 38 30 ■ Anodised aluminium
Values are given in millimetres.