





BSA 38 ACI

TECHNICAL SHEET

BACK BLOW-OFF AIR NOZZLES

OPERATING PRINCIPLE

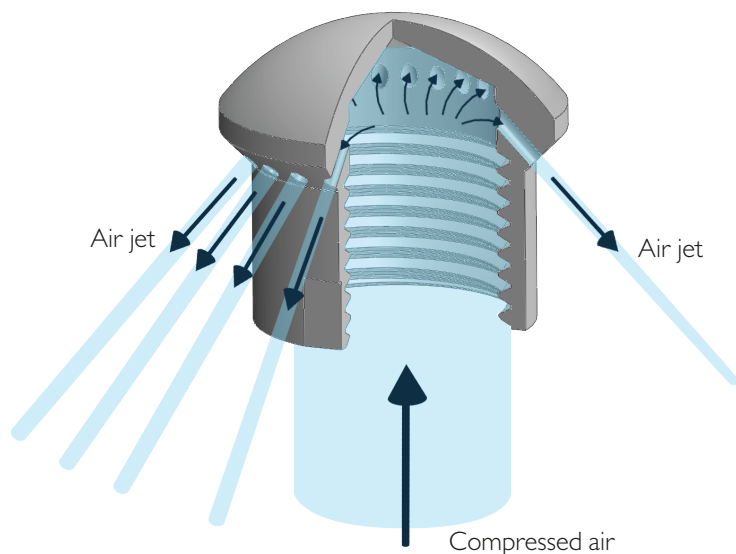



UP TO
-70%
 REDUCTION IN AIR
 CONSUMPTION

TECHNICAL INFORMATION

BENEFITS OF USING THE BSA 38 ACI* (Compared with an internal Ø8 mm hose)	Reduction in air consumption (%)		Noise reduction(%)
	Up to -70%		Up to -13%
BSA 38 ACI BLOW-OFF NOZZLE PERFORMANCE*	Pressure (bar)	Air consumption (l/min)	Sound level(dB)
	2	447	96
	6	658	107

BSA 38 ACI Blow-Off Nozzle Specifications


- Connection : Female G3/8" • Weight : 316 L Stainless Steel : 26,64g
- Maximum operating temperature : 316 L Stainless Steel : 450 °C • Maximum pressure : 6 bar

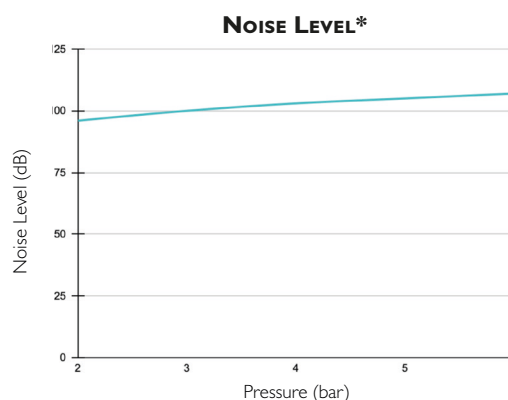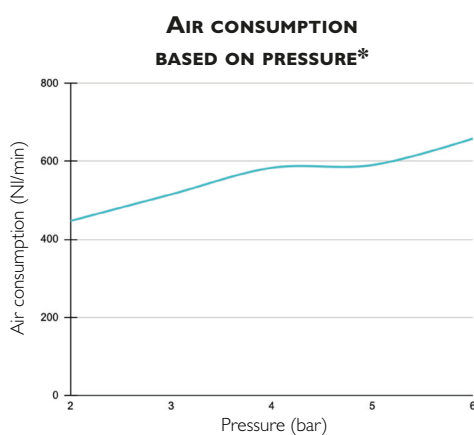

NOTE: The measurements presented in this technical sheet were carried out in a laboratory under strictly controlled conditions. It is important to note that conditions in a real industrial environment may differ, and that pressure instability from an industrial compressor may lead to values different from those obtained in the laboratory. These data are provided for information purposes only.

To achieve optimal performance from the rotary blow-off nozzle, we recommend using a compressed-air supply hose with a minimum internal diameter of 8 mm.

DIMENSIONS

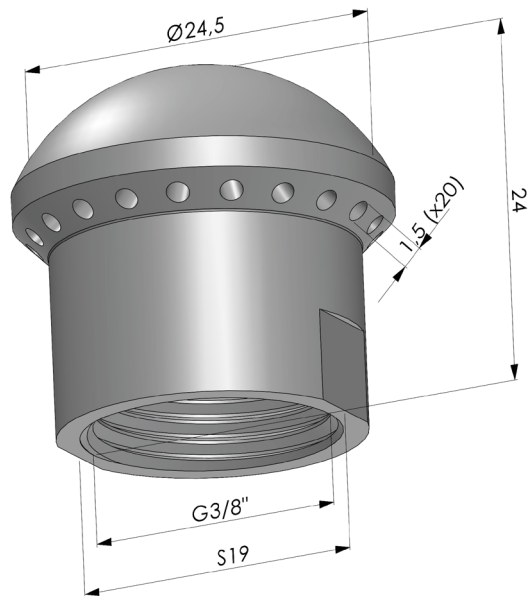

BSA 38 ACI ■ 316L Stainless Steel
Values are given in millimetres.