


TP 25 TECHNICAL SHEET EJECTORS

PNEUMATIC TRANSPORT SERIES



OPERATING PRINCIPAL

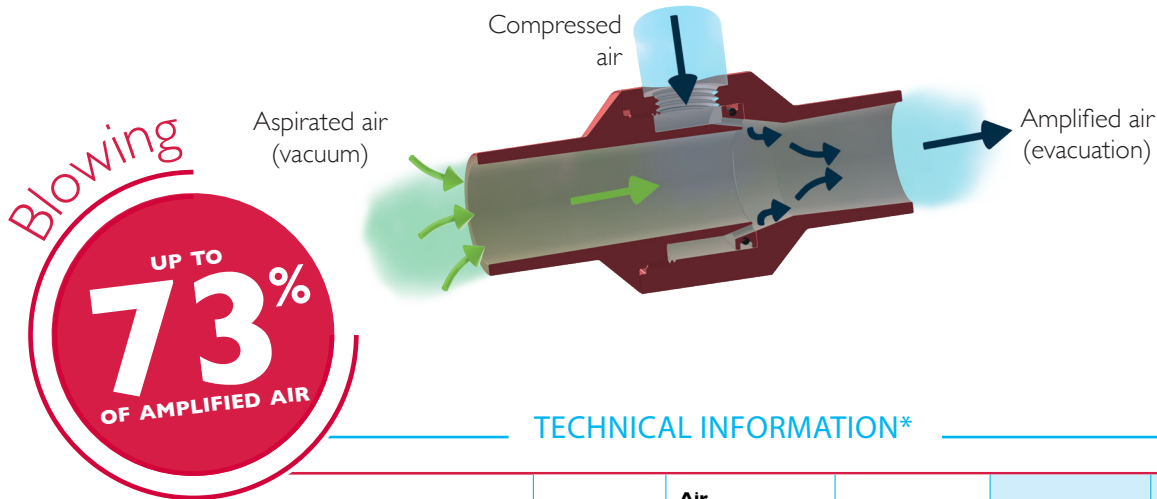


TECHNICAL INFORMATION*

BENEFITS OF USING A TP 25* EJECTOR	Pressure (bar)	Air Consumption (NI/mm)	Noise level (dB)	Suction rate (NI/min)	Amplified Air (l/min)
	6	629	102	4400	5700


TP 25* FEATURES

- **Connection** : Female G1/4" • **Weight** : Aluminium : 120g - Stainless Steel 316L: 370g • **Max.Operating Temperature** : Aluminium : 80°C - Stainless Steel 316L : 80°C
- **Max pressure** : 7 bar • **Materials** : Aluminium / Stainless Steel 316L, standard nitrile seal


AIR CONSUMPTION DEPENDING ON PRESSURE

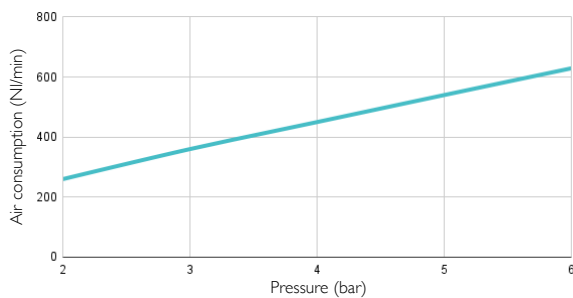


ASPIRATED AIR DEPENDING ON PRESSURE

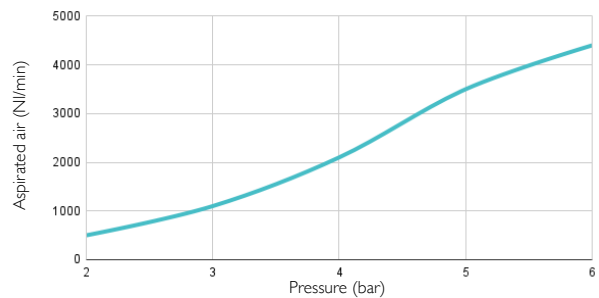

AMPLIFIED AIR DEPENDING ON PRESSURE

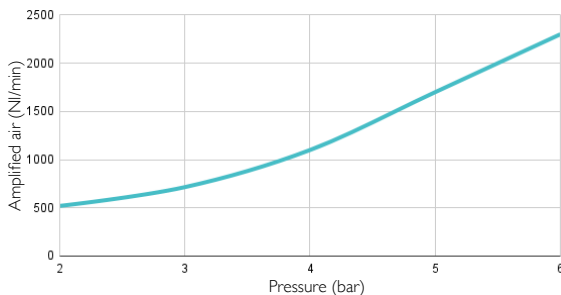


NOISE LEVEL DEPENDING ON PRESSURE

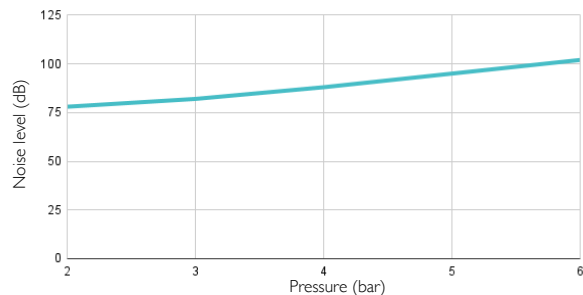

* **NOTE** : We recommend using a Øint.8mm tube to supply the TP 25, in order to obtain optimal performances.

DIMENSIONS

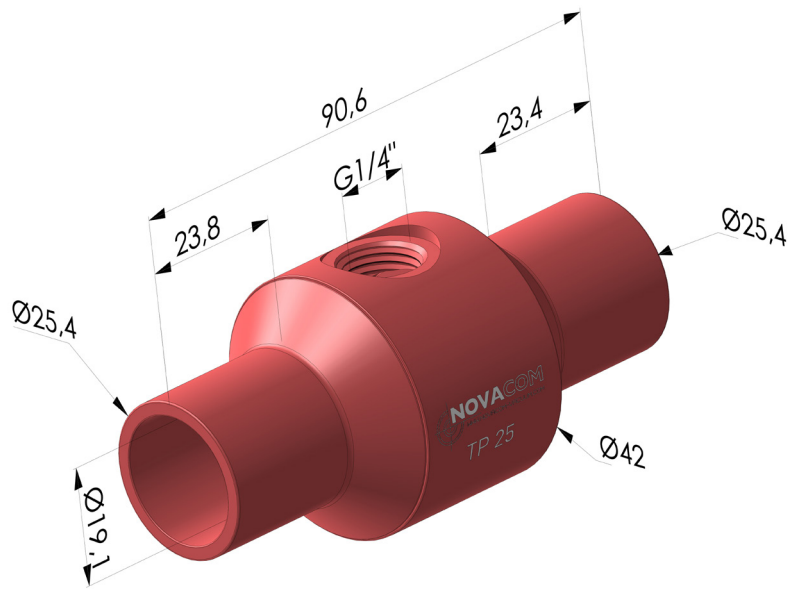

TP 25 ■ Aluminium

TP 25 ■ Stainless Steel 316L