




PVP 2

TECHNICAL SHEET

MULTI-STAGE EJECTORS

PVP SERIES

OPERATING PRINCIPAL

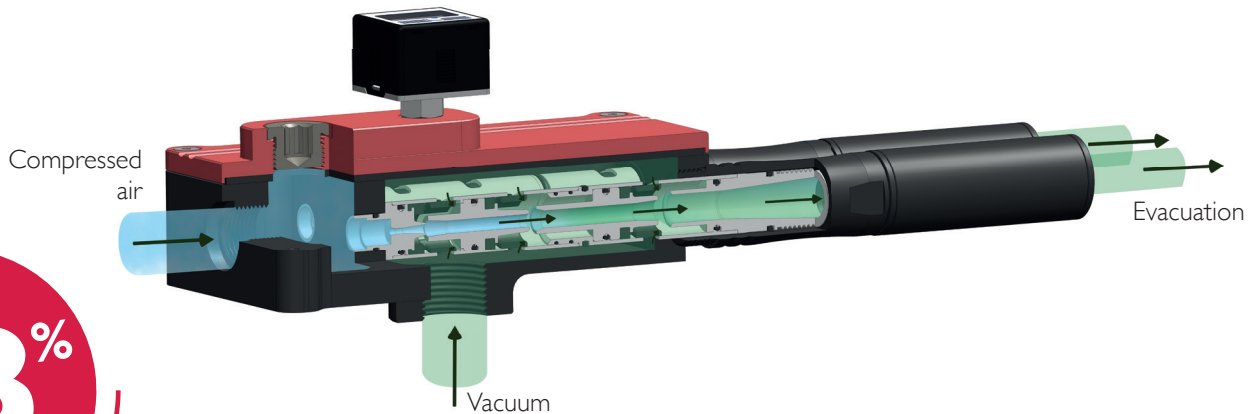

Vacuum

UP TO
93%
OF VACUUM


TECHNICAL INFORMATION*

BENEFITS OF USING MULTI-STAGE EJECTOR PVP 2*	Pressure (bar)	Air Consumption (Nl/mn)	Noise level (dB)	Vacuum level (%)	Suction rate (l/min)
	6	273	82	93	640


PVP 2* FEATURES

- **Connection** : 2x Female G3/8" • **Weight** : 780 g • **Max. Operating Temperature** : 80°C
- **Max pressure** : 7 bar • **Materials** : Aluminium, standard nitrile seal


AIR CONSUMPTION DEPENDING ON PRESSURE

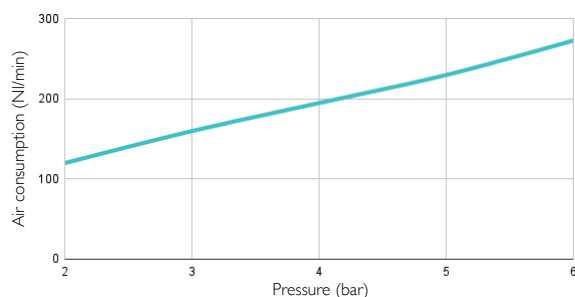


ASPIRATED AIR DEPENDING ON PRESSURE

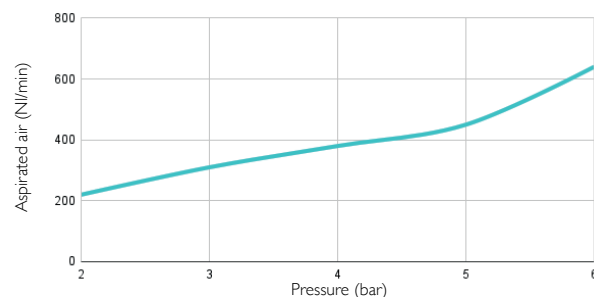

VACUUM LEVEL (%) DEPENDING ON PRESSURE

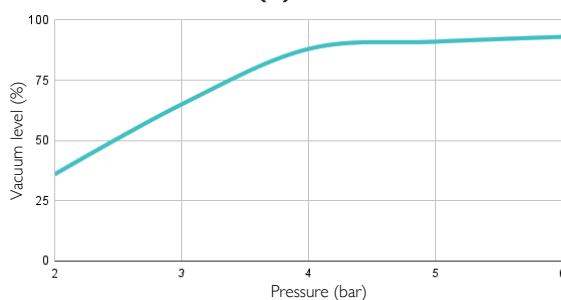


NOISE LEVEL

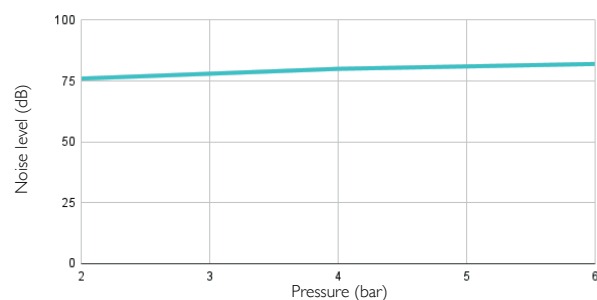

* **NOTE** : We recommend supplying the PVP 2, using a Ø 8mm tube in order to obtain optimal performances.

DIMENSIONS

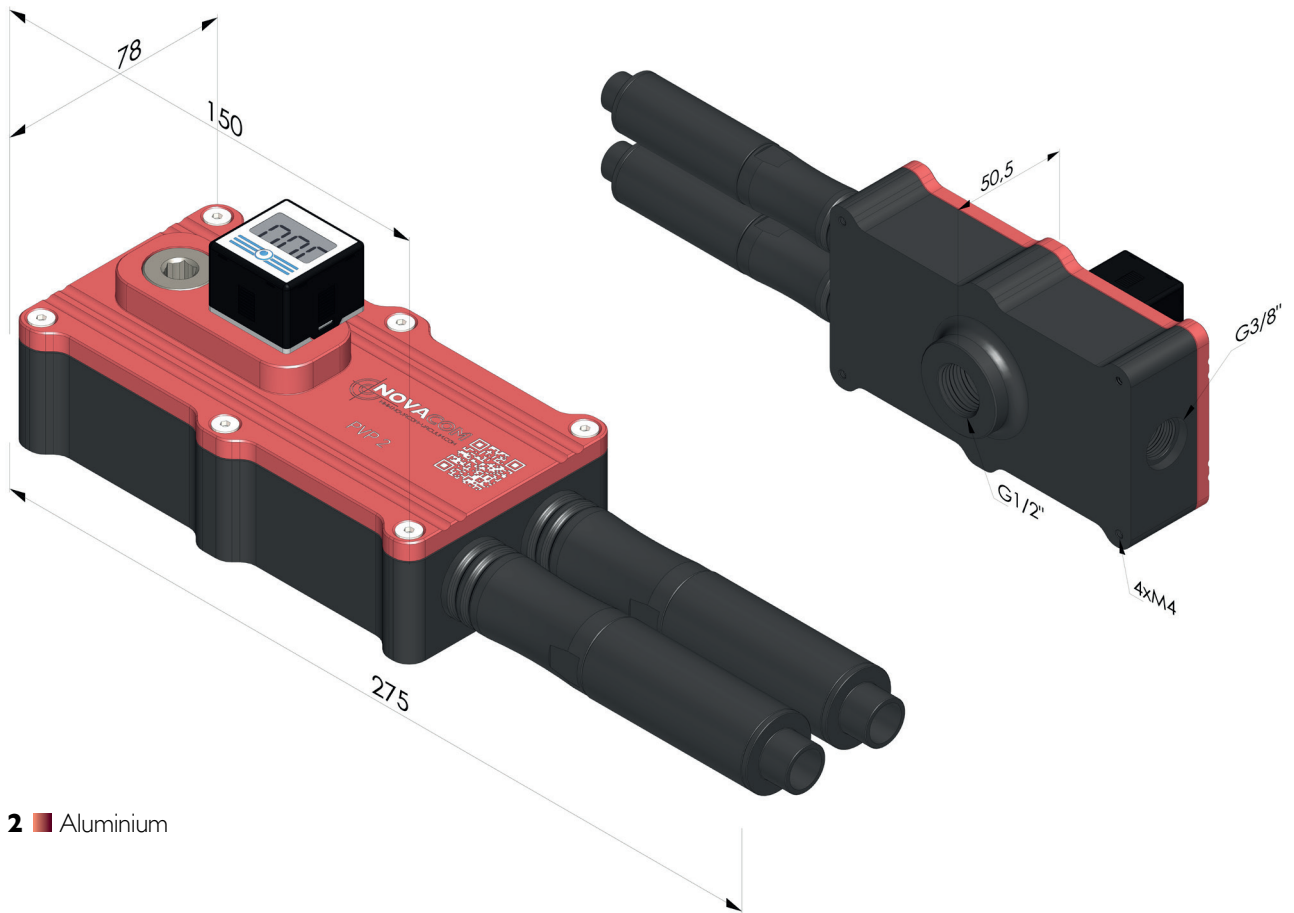

PVP 2 ■ Aluminium