

VCR-2 200 14


TECHNICAL SHEET

SINGLE-STAGE EJECTOR

VCR-2 SERIES



OPERATING PRINCIPAL

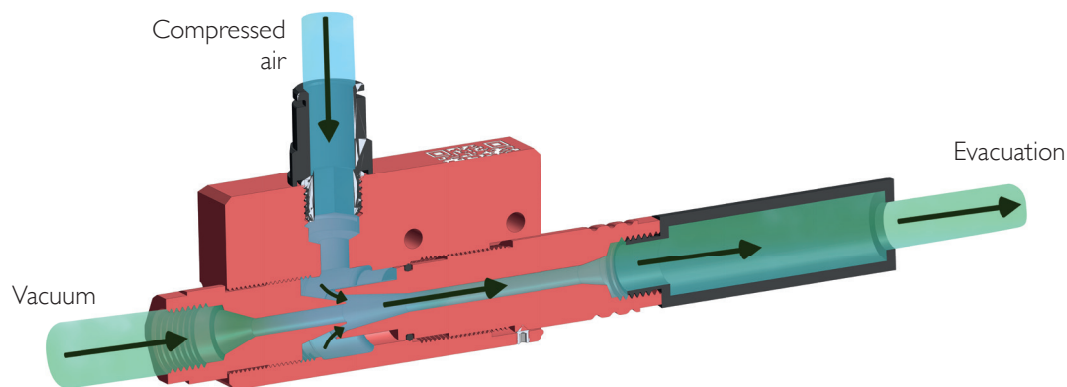

Vacuum

UP TO
85%
OF VACUUM

TECHNICAL INFORMATION*


**BENEFITS
OF USING A
SINGLE-STAGE
EJECTOR
VCR-2 200 14***

Pressure (bar)	Air consumption (NI/min)	Noise level (dB)	Vacuum level (%)	Suction rate (NI/min)
6	260	82	85	190


VCR-2 200 14* FEATURES

- **Connection** : Female G1/4" • **Weight** : Aluminium : 214 g - Stainless Steel 316L : 580g • **Max. Operating Temperature** : 80 °C
- **Max pressure** : 7 bar • **Materials** : Aluminium / Stainless Steel 316L, standard nitrile seal


AIR CONSUMPTION DEPENDING ON PRESSURE

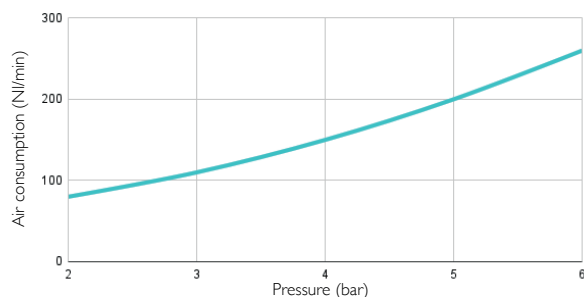


ASPIRATED AIR DEPENDING ON PRESSURE

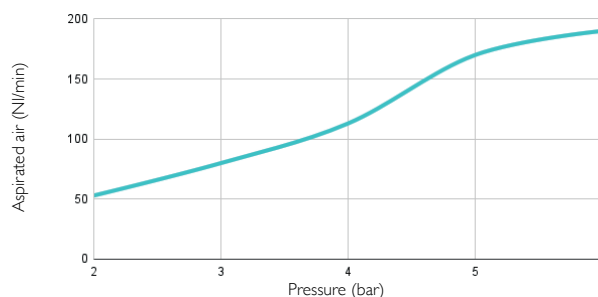

VACUUM LEVEL (%) DEPENDING ON PRESSURE

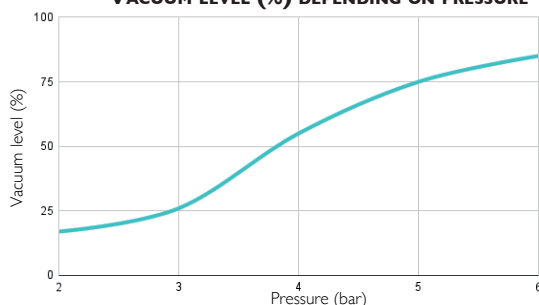


NOISE LEVEL DEPENDING ON PRESSURE

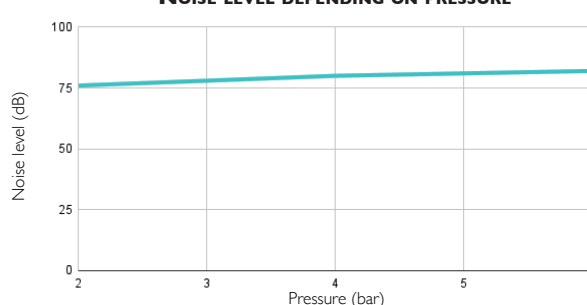

* **NOTE** : We recommend using a Ø8mm tube to supply the VCR-2 200 14, in order to obtain optimal performances.

DIMENSIONS

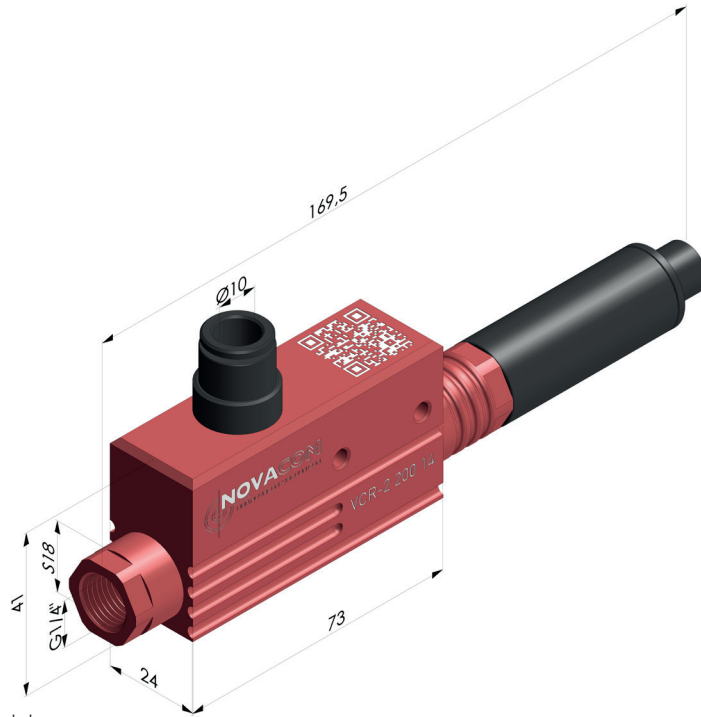

VCR-2 200 I4 ■ Aluminium

VCR-2 200 I4 ■ Stainless Steel 316L