


**TECHNICAL INFORMATION**

- Range :** Suction cup  
**Category :** With bellows  
**Series :** 8  
**Shape :** 2.5 Bellows  
**Contact lip diameter :** 20 mm  
**inner barrel diameter :** 8 mm  
**Number of bellows :** 2.5 Bellows  
**Horizontal force :** 15 N  
**Vertical force :** 7.5 N  
**Arrow :** 9.5 mm



**Variants:**

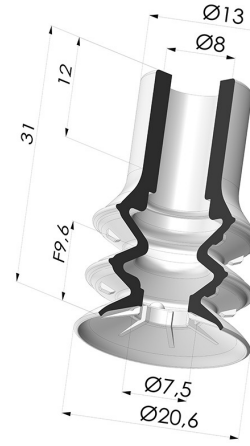

Variant reference:  
**88B 20SLT A SH40**

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH40



Variant reference:  
**88B 20SLT A**

- Color: Translucent
- CE food certified
- Matter: Silicone
- Shore Hardness: SH60



Variant reference:  
**88B 20SLDB A**

- Color: Blue
- Matter: Detectable silicone
- Shore Hardness: SH40



Variant reference:  
**88B 20SLBLEU ASH50**

- Color: Blue food-grade CE certification
- Matter: Silicone
- Shore Hardness: SH50


**Material guide:**

	Material	Code	Temperature resistance (°C)	Flexibility	Abrasion resistance	UV/Weather resistance	Oil resistance	Food compatibility	Migration test
	Silicone Translucent (Shore SH40)	SL T	-60/+250	✓✓✓	✓	✓✓✓	✓	FDA  **	✗
	Silicone Translucent (Shore SH60)	SL T	-60/+250	✓✓✓	✓	✓✓✓	✓	FDA  **	✗
	Detectable silicone Blue (Shore SH40)	SLDBLEU	60/+250	✓✓✓	✗	✓✓✓	✗	FDA  **	✗
	Silicone Blue food-grade CE certification (Shore SH50)	SLBLEU	-60/+250	✓✓✓	✗	✓✓✓	✗	FDA  **	A, B, D2

Requests for FDA and/or EC certificates must be made AT THE TIME OF ORDER. Any later request will incur additional charges. To meet the expectations of our industrial customers, NOVACOM offers the widest range of elastomer and thermoplastic materials. We can also develop new materials based on precise specifications, in order to solve specific applications for our customers.

Excellent | Good | Low | Poor | Not recommended  
 \*FDA and/or EC certificate may be requested for various references at the time of order; please contact us.  
 \*\* Food contact certification: (EC) 1935/2004 - (FDA) 21 CFR 177.2600  
 \*\*\* Food contact certification: (EC) 10/2011 - (FDA) 21 CFR

## Related products:




### Separable Female Fitting G1/4"

Product reference: D




### Separable Male Fitting G1/4"

Product reference: E



### Separable Female Fitting G1/8"

Product reference: H



### Separable Male Fitting G1/8"

Product reference: I